
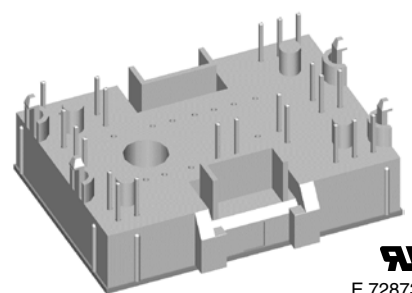


Converter - Brake - Inverter Module NPT IGBT

Single Phase Rectifier	Brake Chopper	Three Phase Inverter
$V_{RRM} = 1600 \text{ V}$	$V_{CES} = 600 \text{ V}$	$V_{CES} = 600 \text{ V}$
$I_{DAVM25} = 65 \text{ A}$	$I_{C25} = 23 \text{ A}$	$I_{C25} = 23 \text{ A}$
$I_{FSM} = 550 \text{ A}$	$V_{CE(sat)} = 2.1 \text{ V}$	$V_{CE(sat)} = 2.1 \text{ V}$

Part name (Marking on product)

MIAA15WE600TMH

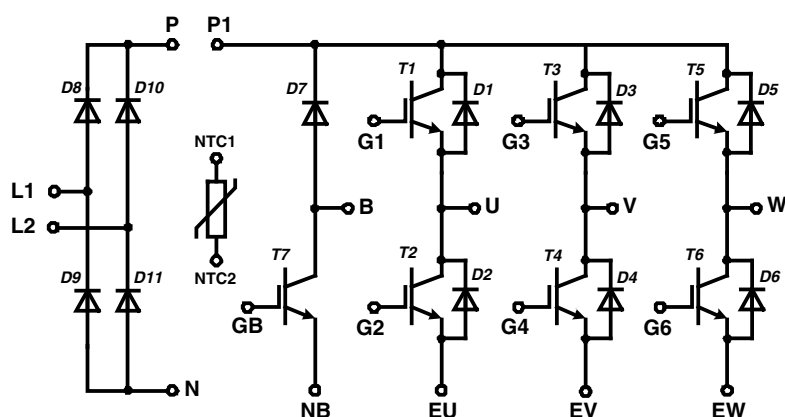

UL
E 72873

Pin configuration see outlines.

Features:

- High level of integration - only one power semiconductor module required for the whole drive
- Inverter with NPT IGBTs
 - low saturation voltage
 - positive temperature coefficient
 - fast switching
 - short tail current
- Epitaxial free wheeling diodes with hiperfast soft reverse recovery
- Temperature sense included

Application:

- AC motor drives
- Pumps, Fans
- Washing machines
- Air-conditioning system
- Inverter and power supplies

Package:

- "Mini" package
- Assembly height is 17 mm
- Insulated base plate
- Pins suitable for wave soldering and PCB mounting
- Assembly clips available
 - IXKU 5-505 screw clamp
 - IXRB 5-506 click clamp
- UL registered E72873

Output Inverter T1 - T6

				Ratings		
Symbol	Definitions	Conditions	min.	typ.	max.	Unit
V _{CES}	collector emitter voltage	T _{VJ} = 150°C			600	V
V _{GES}	max. DC gate voltage	continuous			±20	V
V _{GEM}	max. transient collector gate voltage	transient			±30	V
I _{C25}	collector current	T _C = 25°C			23	A
I _{C80}		T _C = 80°C			16	A
P _{tot}	total power dissipation	T _C = 25°C			80	W
V _{CE(sat)}	collector emitter saturation voltage	I _C = 15 A; V _{GE} = 15 V		2.1 2.3	2.5	V V
V _{GE(th)}	gate emitter threshold voltage	I _C = 0.4 A; V _{GE} = V _{CE}	T _{VJ} = 25°C 4.5	5.5	6.5	V
I _{CES}	collector emitter leakage current	V _{CE} = V _{CES} ; V _{GE} = 0 V	T _{VJ} = 25°C T _{VJ} = 125°C	1.0	0.6	mA mA
I _{GES}	gate emitter leakage current	V _{GE} = ±20 V			150	nA
C _{ies}	input capacitance	V _{CE} = 25 V; V _{GE} = 0 V; f = 1 MHz		700		pF
Q _{G(on)}	total gate charge	V _{CE} = 300 V; V _{GE} = 15 V; I _C = 15 A		57		nC
t _{d(on)}	turn-on delay time	inductive load V _{CE} = 300 V; I _C = 15 A V _{GE} = ±15 V; R _G = 68 Ω	T _{VJ} = 25°C	40		ns
t _r	current rise time			45		ns
t _{d(off)}	turn-off delay time			155		ns
t _f	current fall time			95		ns
E _{on}	turn-on energy per pulse			0.35		mJ
E _{off}	turn-off energy per pulse			0.27		mJ
t _{d(on)}	turn-on delay time	inductive load V _{CE} = 300 V; I _C = 15 A V _{GE} = ±15 V; R _G = 68 Ω	T _{VJ} = 125°C	40		ns
t _r	current rise time			45		ns
t _{d(off)}	turn-off delay time			160		ns
t _f	current fall time			120		ns
E _{on}	turn-on energy per pulse			0.55		mJ
E _{off}	turn-off energy per pulse			0.4		mJ
RBSOA	reverse bias safe operating area	V _{GE} = ±15 V; R _G = 68 Ω; I _C = 30 A	T _{VJ} = 125°C	V _{CEK} ≤ V _{CES} - L _S ·di/dt		V
I _{SC} (SCSOA)	short circuit safe operating area	V _{CE} = 360 V; V _{GE} = ±15 V; R _G = 68 Ω; t _p = 10 μs; non-repetitive	T _{VJ} = 125°C	65		A
R _{thJC} R _{thCH}	thermal resistance junction to case thermal resistance case to heatsink	(per IGBT)		0.55	1.6	K/W K/W

Output Inverter D1 - D6

				Ratings		
Symbol	Definitions	Conditions	min.	typ.	max.	Unit
V_{RRM}	<i>max. repetitive reverse voltage</i>		$T_{VJ} = 150^{\circ}\text{C}$		600	V
I_{F25}	<i>forward current</i>		$T_C = 25^{\circ}\text{C}$		37	A
I_{F80}			$T_C = 80^{\circ}\text{C}$		24	A
V_F	<i>forward voltage</i>	$I_F = 15\text{ A}; V_{GE} = 0\text{ V}$	$T_{VJ} = 25^{\circ}\text{C}$ $T_{VJ} = 125^{\circ}\text{C}$	1.8 1.3	2.1	V V
Q_{rr}	<i>reverse recovery charge</i>	$V_R = 300\text{ V}$ $di_F/dt = -380\text{ A}/\mu\text{s}$ $I_F = 15\text{ A}; V_{GE} = 0\text{ V}$	$T_{VJ} = 125^{\circ}\text{C}$	0.58		μC
I_{RM}	<i>max. reverse recovery current</i>			11.5		A
t_{rr}	<i>reverse recovery time</i>			115		ns
E_{rec}	<i>reverse recovery energy</i>			50		μJ
R_{thJC}	<i>thermal resistance junction to case</i>	(per diode)			1.6	K/W
R_{thCH}	<i>thermal resistance case to heatsink</i>			0.55		K/W

 $T_C = 25^{\circ}\text{C}$ unless otherwise stated

IXYS reserves the right to change limits, test conditions and dimensions.

20080327b

© 2008 IXYS All rights reserved

2 - 8

Brake T7

					Ratings		
Symbol	Definitions	Conditions	min.	typ.	max.	Unit	
V _{CES}	collector emitter voltage	T _{VJ} = 150°C			600	V	
V _{GES}	max. DC gate voltage	continuous			±20	V	
V _{GEM}	max. transient collector gate voltage	transient			±30	V	
I _{C25}	collector current	T _C = 25°C			23	A	
I _{C80}		T _C = 80°C			16	A	
P _{tot}	total power dissipation	T _C = 25°C			80	W	
V _{CE(sat)}	collector emitter saturation voltage	I _C = 15 A; V _{GE} = 15 V	T _{VJ} = 25°C T _{VJ} = 125°C	2.1 2.3	2.5	V V	
V _{GE(th)}	gate emitter threshold voltage	I _C = 0.4 A; V _{GE} = V _{CE}	T _{VJ} = 25°C	4.5	5.5	6.5	V
I _{CES}	collector emitter leakage current	V _{CE} = V _{CES} ; V _{GE} = 0 V	T _{VJ} = 25°C T _{VJ} = 125°C	0.6	0.5	mA mA	
I _{GES}	gate emitter leakage current	V _{GE} = ±20 V			150	nA	
C _{ies}	input capacitance	V _{CE} = 25 V; V _{GE} = 0 V; f = 1 MHz		700		pF	
Q _{G(on)}	total gate charge	V _{CE} = 300 V; V _{GE} = 15 V; I _C = 15 A		57		nC	
t _{d(on)}	turn-on delay time	inductive load V _{CE} = 300 V; I _C = 15 A V _{GE} = ±15 V; R _G = 68 Ω	T _{VJ} = 25°C	40		ns	
t _r	current rise time			45		ns	
t _{d(off)}	turn-off delay time			155		ns	
t _f	current fall time			95		ns	
E _{on}	turn-on energy per pulse			0.35		mJ	
E _{off}	turn-off energy per pulse			0.27		mJ	
t _{d(on)}	turn-on delay time	inductive load V _{CE} = 300 V; I _C = 15 A V _{GE} = ±15 V; R _G = 68 Ω	T _{VJ} = 125°C	40		ns	
t _r	current rise time			45		ns	
t _{d(off)}	turn-off delay time			160		ns	
t _f	current fall time			120		ns	
E _{on}	turn-on energy per pulse			0.55		mJ	
E _{off}	turn-off energy per pulse			0.4		mJ	
RBSOA	reverse bias safe operating area	V _{GE} = ±15 V; R _G = 68 Ω; I _C = 30 A	T _{VJ} = 125°C	V _{CEK} ≤ V _{CES} - L _S · di/dt		V	
I _{SC} (SCSOA)	short circuit safe operating area	V _{CE} = 360 V; V _{GE} = ±15 V; R _G = 68 Ω; t _p = 10 μs; non-repetitive	T _{VJ} = 125°C	65		A	
R _{thJC}	thermal resistance junction to case	(per IGBT)			1.6	K/W	
R _{thCH}	thermal resistance case to heatsink			0.55		K/W	

Brake Chopper D7

					Ratings		
Symbol	Definitions	Conditions	min.	typ.	max.	Unit	
V _{RRM}	max. repetitive reverse voltage	T _{VJ} = 150°C			600	V	
I _{F25}	forward current	T _C = 25°C			37	A	
I _{F80}		T _C = 80°C			24	A	
V _F	forward voltage	I _F = 15 A; V _{GE} = 0 V	T _{VJ} = 25°C T _{VJ} = 125°C	1.8 1.3	2.1	V V	
I _R	reverse current	V _R = V _{RRM}	T _{VJ} = 25°C T _{VJ} = 125°C	0.4	0.1	mA mA	
Q _{rr}	reverse recovery charge	V _R = 300 V di _F /dt = -380 A/μs I _F = 15 A; V _{GE} = 0 V	T _{VJ} = 125°C	0.58		μC	
I _{RM}	max. reverse recovery current			11.5		A	
t _{rr}	reverse recovery time			115		ns	
E _{rec}	reverse recovery energy			50		μJ	
R _{thJC}	thermal resistance junction to case	(per diode)			1.6	K/W	
R _{thCH}	thermal resistance case to heatsink			0.55		K/W	

 $T_C = 25^{\circ}\text{C}$ unless otherwise stated

IXYS reserves the right to change limits, test conditions and dimensions.

20080327b

Input Rectifier Bridge D8 - D11

Symbol	Definitions	Conditions	min.	Ratings			Unit
				typ.	max.		
V_{RRM}	max. repetitive reverse voltage	$T_{VJ} = 25^{\circ}\text{C}$			1600		V
I_{FAV}	average forward current	sine 180°			39		A
I_{DAVM}	max. average DC output current	rect.; $d = 1/2$			42		A
I_{FSM}	max. forward surge current	$t = 10 \text{ ms}$; sine 50 Hz			550		A
					tbd		A
I^2t	I^2t value for fusing	$t = 10 \text{ ms}$; sine 50 Hz			1270		A^2s
					tbd		A^2s
P_{tot}	total power dissipation	$T_C = 25^{\circ}\text{C}$			100		W
V_F	forward voltage	$I_F = 30 \text{ A}$		1.2	1.5		V
				1.3			V
I_R	reverse current	$V_R = V_{RRM}$			0.03		mA
				0.3			mA
R_{thJC}	thermal resistance junction to case	(per diode)			1.2		K/W
R_{thCH}	thermal resistance case to heatsink	(per diode)		0.4			K/W


Temperature Sensor NTC

Symbol	Definitions	Conditions	min.	Ratings			Unit
				typ.	max.		
R_{25}	resistance	$T_C = 25^{\circ}\text{C}$	4.75	5.0	5.25		$\text{k}\Omega$
$B_{25/50}$				3375			K

Module

Symbol	Definitions	Conditions	min.	Ratings			Unit
				typ.	max.		
T_{VJ}	operating temperature		-40		125		$^{\circ}\text{C}$
T_{VJM}	max. virtual junction temperature				150		$^{\circ}\text{C}$
T_{stg}	storage temperature		-40		125		$^{\circ}\text{C}$
V_{ISOL}	isolation voltage	$I_{ISOL} \leq 1 \text{ mA}$; 50/60 Hz			2500		V~
CTI	comparative tracking index			-			
F_C	mounting force		40		80		N
d_S	creep distance on surface		12.7				mm
d_A	strike distance through air		12				mm
Weight				35			g

Equivalent Circuits for Simulation




Symbol	Definitions	Conditions	min.	Ratings			Unit
				typ.	max.		
V_0	rectifier diode	D8 - D11		0.9			V
R_0				6			$\text{m}\Omega$
V_0	IGBT	T1 - T6		1.15			V
R_0				77			$\text{m}\Omega$
V_0	free wheeling diode	D1 - D6		1.05			V
R_0				30			$\text{m}\Omega$
V_0	IGBT	T7		1.15			V
R_0				77			$\text{m}\Omega$
V_0	free wheeling diode	D7		1.05			V
R_0				35			$\text{m}\Omega$

IXYS reserves the right to change limits, test conditions and dimensions.

 $T_C = 25^{\circ}\text{C}$ unless otherwise stated


20080327b

Circuit Diagram

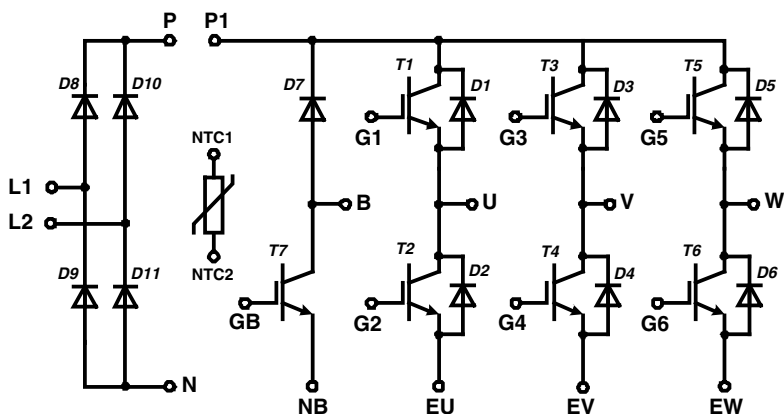


Outline Drawing

Dimensions in mm (1 mm = 0.0394")

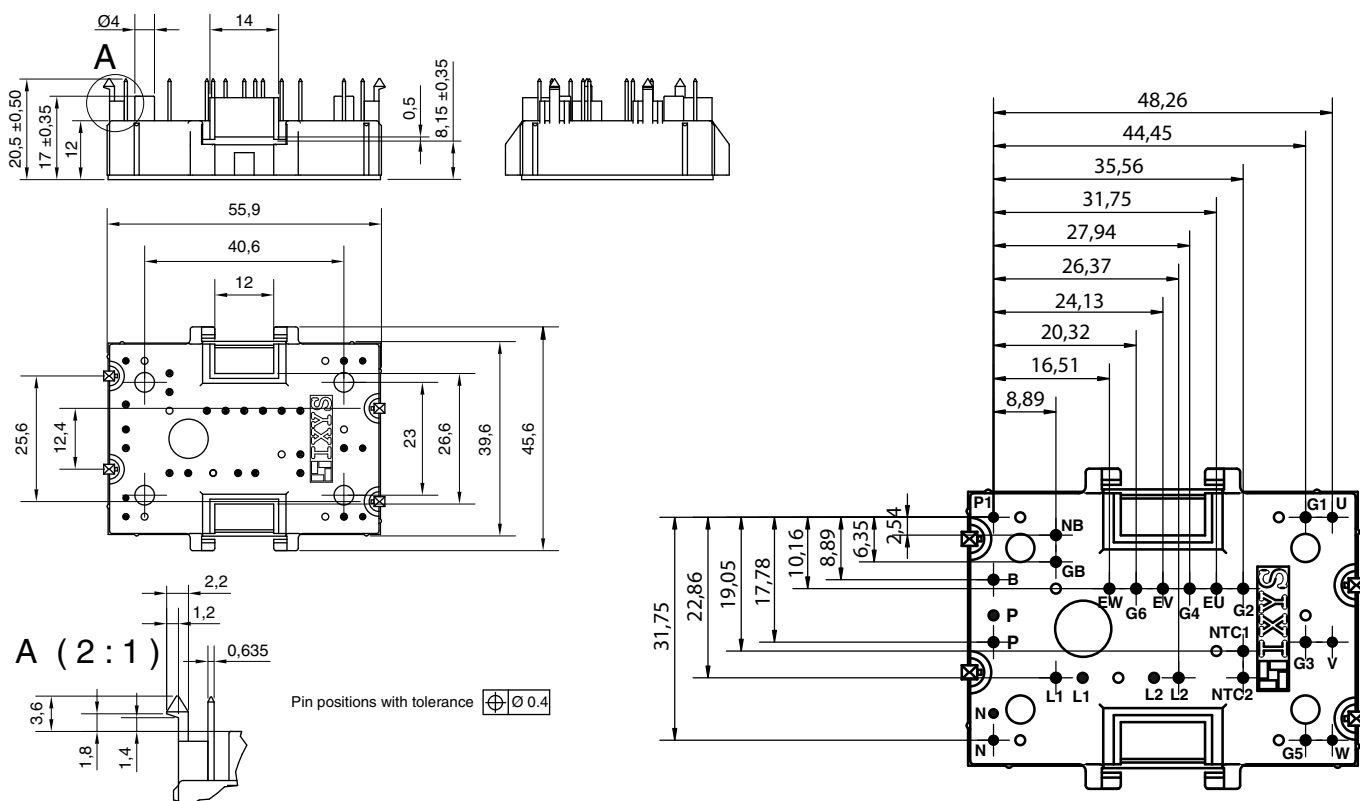

Product Marking



Part number

M = Module
I = IGBT
A = IGBT (NPT)
A = Gen 1 / std
15 = Current Rating [A]
WE = 6-Pack + 1~ Rectifier Bridge & Brake Unit
600 = Reverse Voltage [V]
T = NTC
MH = MiniPack2



Ordering	Part Name	Marking on Product	Delivering Mode	Base Qty	Ordering Code
Standard	MIAA 15 WE 600 TMH	MIAA15WE600TMH	Box	20	504701

IXYS reserves the right to change limits, test conditions and dimensions.


20080327b

© 2008 IXYS All rights reserved


5 - 8

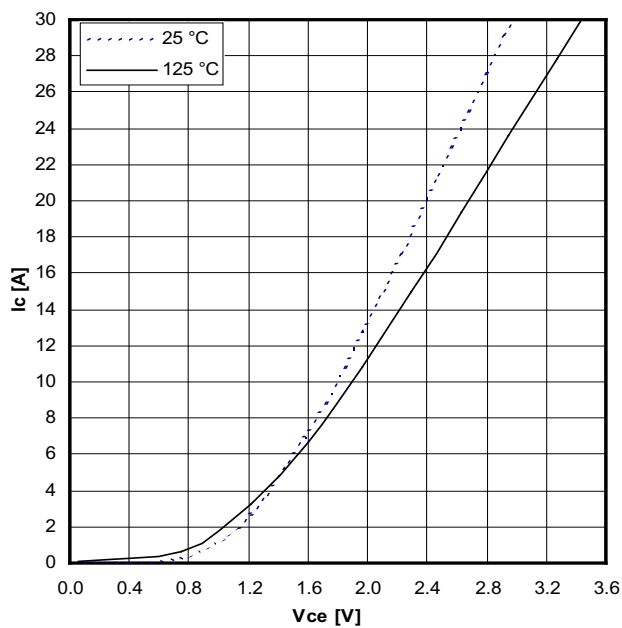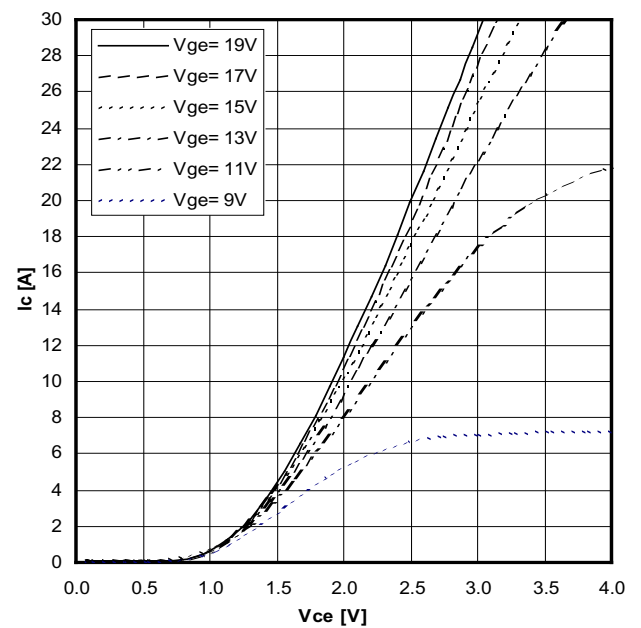Typical output characteristics, $V_{GE} = 15\text{ V}$ 


Typical output characteristics (125 °C)

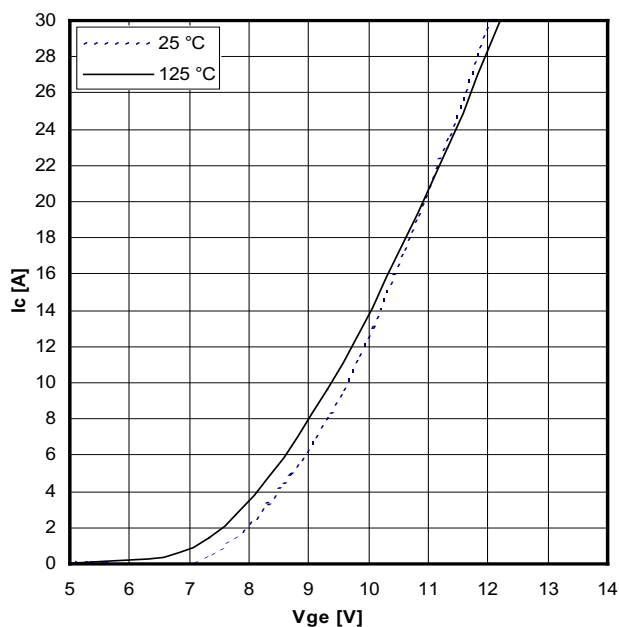


Typical transfer characteristics

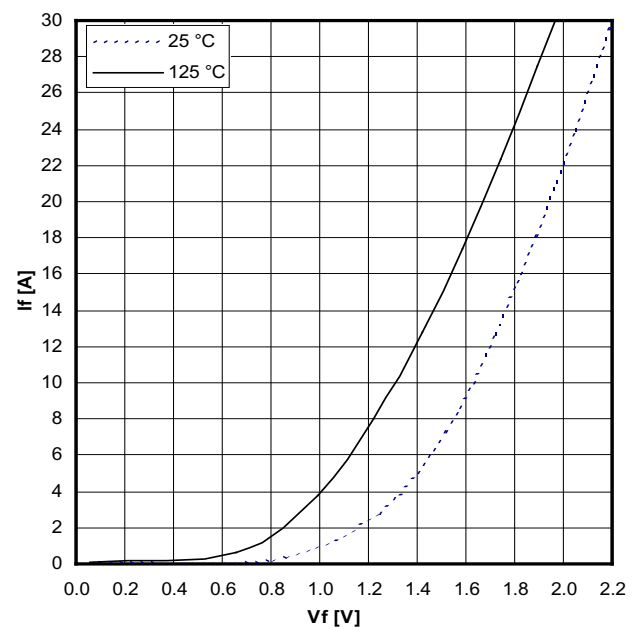


Typical forward characteristics of freewheeling diode

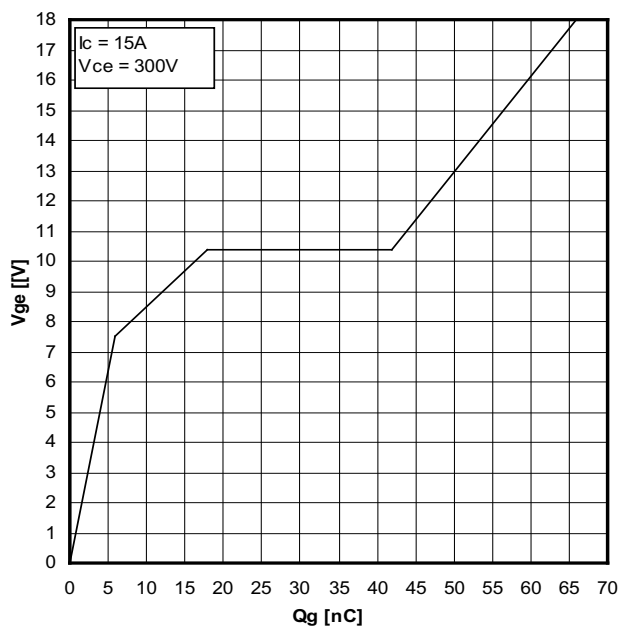


Typical turn on gate charge

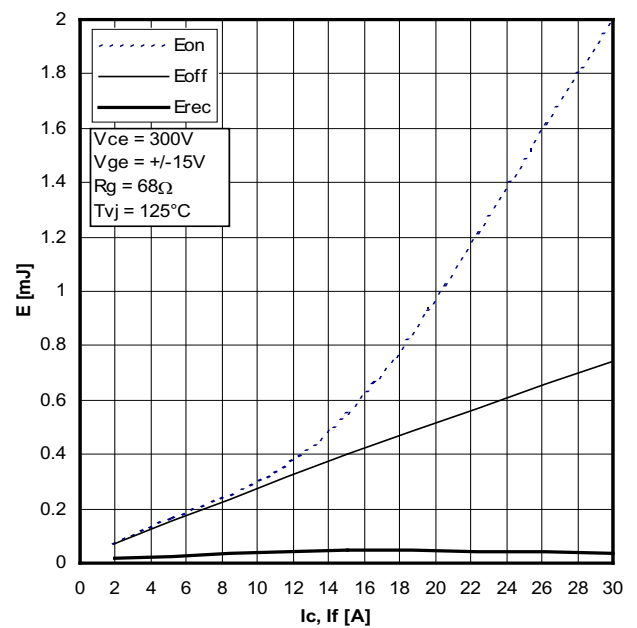


Typical switching energy versus collector current

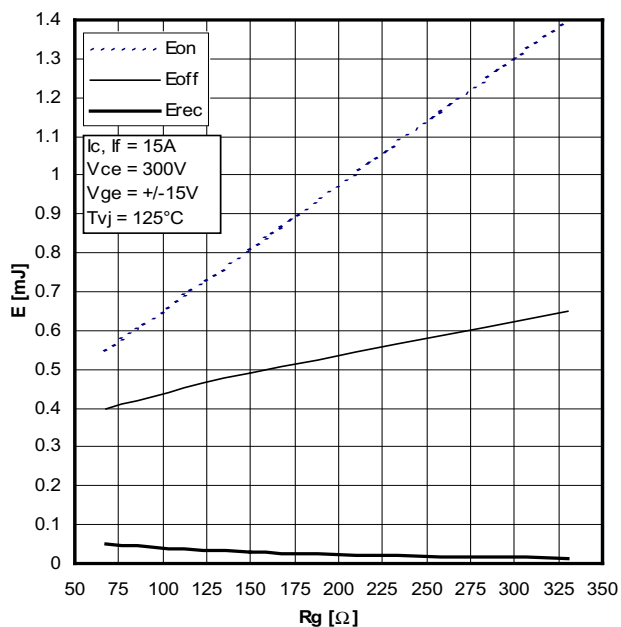


Typical switching energy versus gate resistance

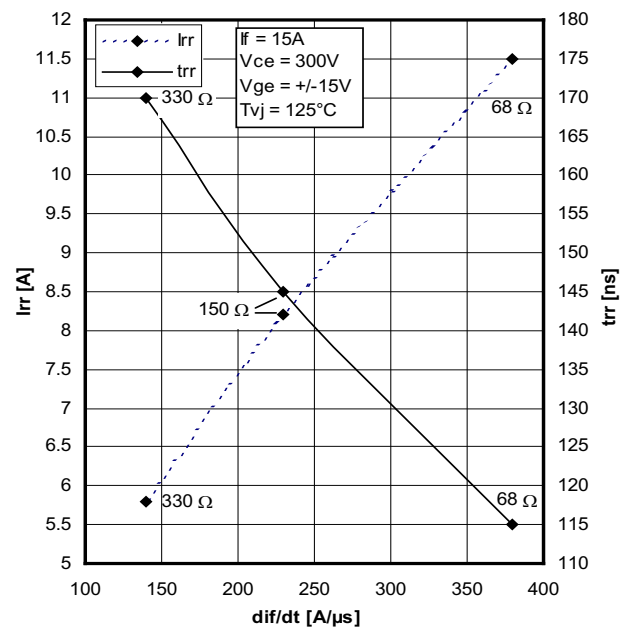


Typical turn-off characteristics of free wheeling diode

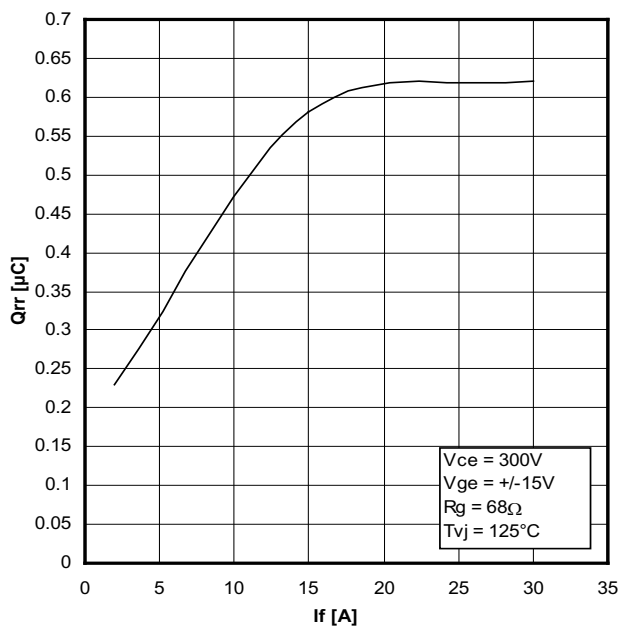

Typical turn-off characteristics of free wheeling diode

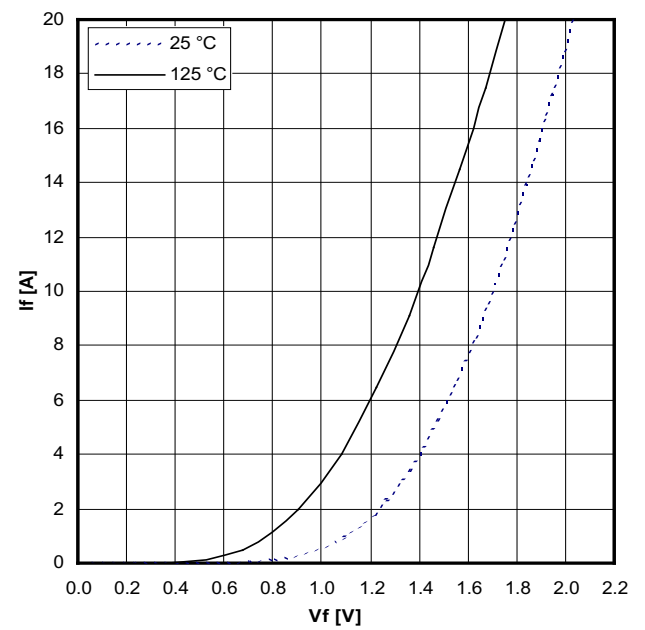

Typical forward characteristics of brake diode

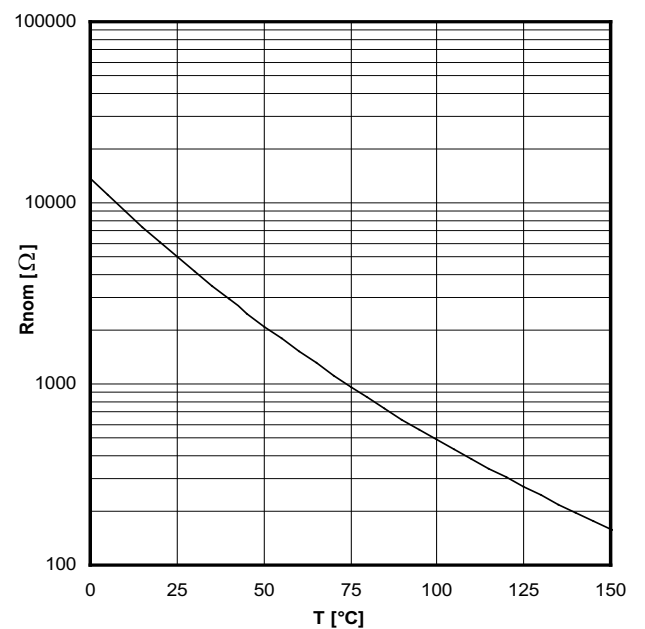

Typical thermistor resistance versus temperature