
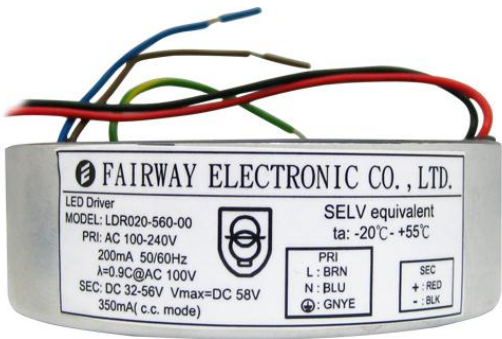


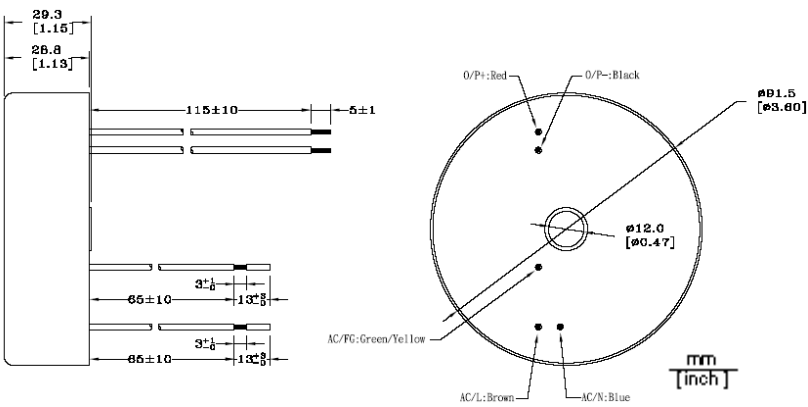

Electrical specifications

Input
Voltage100 - 240 Vac
Current 0.2 Arms MAX.
Inrush Current..... 1.9A MAX
Frequency 47 - 63 Hz
Power factor 99% min. at 115Vac
Total harmonic distortion 20% MAX.
Efficiency..... 80% minimum
Tc (Case Temperature)....71°C Max

Output
Voltage (Vo)..... (see table below)
Current (Io) (see table below)
Power (Po)..... 20W Max.
Maximum output voltage for no load (Vmax).. (see table below)
Over voltage protection... Auto recovery mode
Over current protection... Auto recovery mode
Short circuit protection..... Built-in
Ripple/Noise..... 2V Max. (20MHz bandwidth)

Output Electronic Specifications

Model No.	Vo	Io	Po	Vmax	LED Q'ty
LDR020-250-00	16-25V	700mA	17.5W	29V	5-8
LDR020-560-00	32-56V	350mA	20W	58V	11-18

Features

- Over voltage protection
- Over current protection
- Constant current status
- Level B EMI filter
- High efficiency & High quality
- MTBF 50,000hrs min. at 25°C ambient

Environmental

- Operating temperature**
-20°C to +55°C ambient
- Storage temperature**
-30°C to +80°C ambient

EMI

- Meet FCC Class B
- Meet VCCI Class B
- Meet CISPR 15 Class B

Safety

- CE (EN 61347-1, EN 61347-2-13
EN 55015, EN 61547)
- ENEC 17
- PSE (J 61347-2-13)
- UL 8750
- FCC



益航電子股份有限公司
FAIRWAY ELECTRONIC CO., LTD.

3FL-2, No. 502, Yuanshan Rd., Chung Ho City,
Taipei Hsien, Taiwan, R.O.C.
TEL: 886-2-8227-6630 FAX: 886-2-2222-6752
Web: <http://www.fairway.com.tw>
E-mail: sales@fairway.com.tw