

# PSD-S OE LED BU - Optical element



2700131

<https://www.phoenixcontact.com/us/products/2700131>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

LED permanent light element, 24 V AC/DC, blue



## Your advantages

- Tool-free element changeover
- Can be freely combined
- High light and color intensity
- Minimum LED service life of 50,000 h
- Low power consumption
- Degree of protection IP65

## Commercial data

Item number	2700131
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DR07
Product key	DRL112
Catalog page	Page 516 (C-6-2019)
GTIN	4046356491242
Weight per piece (including packing)	73.2 g
Weight per piece (excluding packing)	72.9 g
Customs tariff number	85318070
Country of origin	DE

# PSD-S OE LED BU - Optical element

2700131

<https://www.phoenixcontact.com/us/products/2700131>



## Technical data

### Notes

#### Note on application

Note on application

Only for industrial use

### Product properties

Product type

Optical element

Area of application

Signal tower

### Electrical properties

#### General

Input voltage

24 V AC/DC

Maximum inrush current

max. 500 mA

Current consumption

typ. 30 mA

Source of light type

LED

Operating time

100 %

Service life electrical


max. 100,000 h

Optical signal type

Permanent light

### Dimensions

#### Dimensional drawing



Height

65.5 mm

Diameter

70 mm

### Material specifications

Calotte color

blue

Material

Polycarbonate PC

### Environmental and real-life conditions

#### Ambient conditions

Degree of protection

IP65 (when installed or with end cover)

Ambient temperature (operation)

-30 °C ... 50 °C

### EMC data

# PSD-S OE LED BU - Optical element



2700131

<https://www.phoenixcontact.com/us/products/2700131>

Electromagnetic compatibility	Conformance with EMC Directive 2014/30/EU
-------------------------------	---

### Mounting

Mounting type	Plug-in mounting
Assembly note	Rubber seal pre-installed for each element
Mounting position	any

# PSD-S OE LED BU - Optical element


2700131

<https://www.phoenixcontact.com/us/products/2700131>



## Drawings

Dimensional drawing

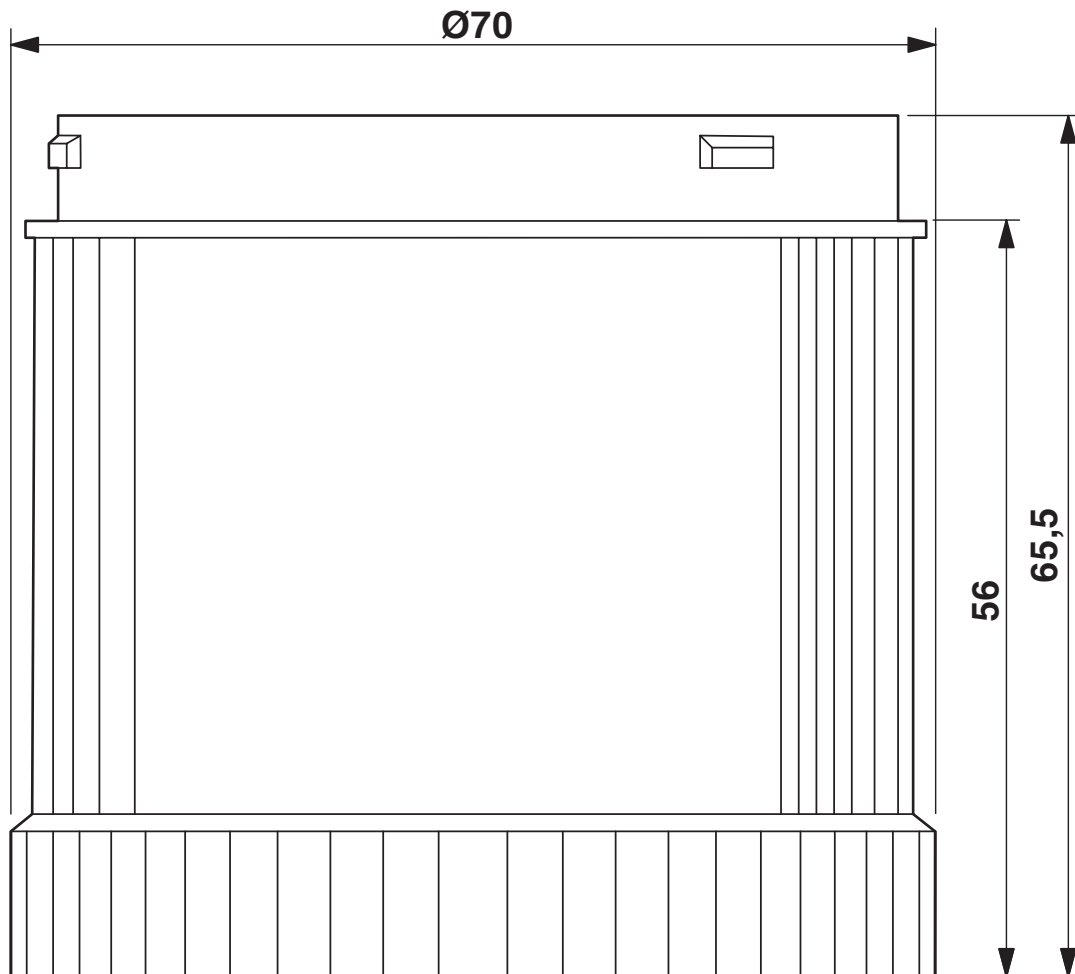


# PSD-S OE LED BU - Optical element



2700131

<https://www.phoenixcontact.com/us/products/2700131>

## Approvals

 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2700131>



**EAC-RoHS**

Approval ID: RU D-DE.HB35.B.00391



**cULus Listed**

Approval ID: E123528

# PSD-S OE LED BU - Optical element



2700131

<https://www.phoenixcontact.com/us/products/2700131>

## Classifications

### ECLASS

ECLASS-11.0	27371220
ECLASS-13.0	27371220
ECLASS-12.0	27371220

### ETIM

ETIM 9.0	EC000232
----------	----------

### UNSPSC

UNSPSC 21.0	46171600
-------------	----------

# PSD-S OE LED BU - Optical element



2700131

<https://www.phoenixcontact.com/us/products/2700131>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	7(a), 7(c)-I

### China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

### EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	d6b5b597-43e8-40b0-a07c-e43712446df2

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)