



GTO Snubber Capacitors, Dry Self-healing

PART NO.**ART. NO.****GTO 4000-0.12 R****42844****DESIGN DATA**

Diameter	55mm
Height	59mm
Drawing	20-B-050
Weight	0.1kg
Casing material	plastic
Mounting position	every position

LIFE EXPECTANCY

> 100000 Std

FAILURE RATE

300 FIT

NOMINAL RATINGS

Capacitance/Tolerance	CN	0.12uF $\pm$ 5%
Rated voltage	UN	4000V
Rated DC voltage	Udc	3000VDC
Rated RMS voltage	Urms	1400VAC
Peak voltage period.	Us	4000VDC
Peak voltage not period.	Usmax	4600VDC
Voltage raise	du/dt	4000V/us
Rated current	In	20A
Peak current	Is	480A

Inductance	Ls	< 10nH
Loss factor diel.	tand	< $2 \cdot 10^{-4}$
Loss factor 50Hz	tand	< $2 \cdot 10^{-4}$
Loss factor 1kHz	tand	< $10.0 \cdot 10^{-4}$

ROUTINE TESTS

Test voltage terminal/terminal	UT/T	6000V, DC, 10s
--------------------------------	------	----------------

DIMENSIONS**OPERATING TEMPERATURE**

Minimum ambient temperature	Ta min	- 40°C
Maximum ambient temperature	Ta max	70°C
Minimum casing temperature	Tc min	- 40°C
Maximum casing temperature	Tc max	75°C

Storage temperature


Minimum temperature	Tmin	- 50°C
Maximum temperature	Tmax	85°C

TECHNOLOGY

Dielectric	Polypropylene film metallized, self-healing
Filling material	resin, polyurethane dry

BUSHING

Internal thread	M6 depth 8mm
Max. torque	6Nm
Air distance	79mm
Creepage distance	79mm

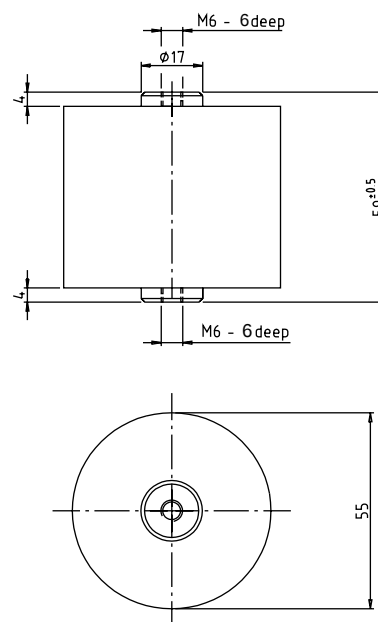



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.