

**MICRO SWITCH**FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ-2RW53-A2**BZ-2RW53-A2**

PAGE 1 OF 1

MDRAWING
NUMBERISSUE
7

REPLACES

RELEASE NO.

CHECK

CHECK

REVISIONS

A	CO17410
	OMW
23	DEC 63
B	CO-73270
	JWB
24	SEP 92
C	CO-73287-D
	KDR
28	MAY 93
D	CO-77589
	MAM
29	MAR 94
E	CO93346
	DLT
11	SEP 98

CHECK

DAW 23 DEC 63

CHECK

63

DEC


OMW

23

FORMTEK

FO-50378

DRAWN

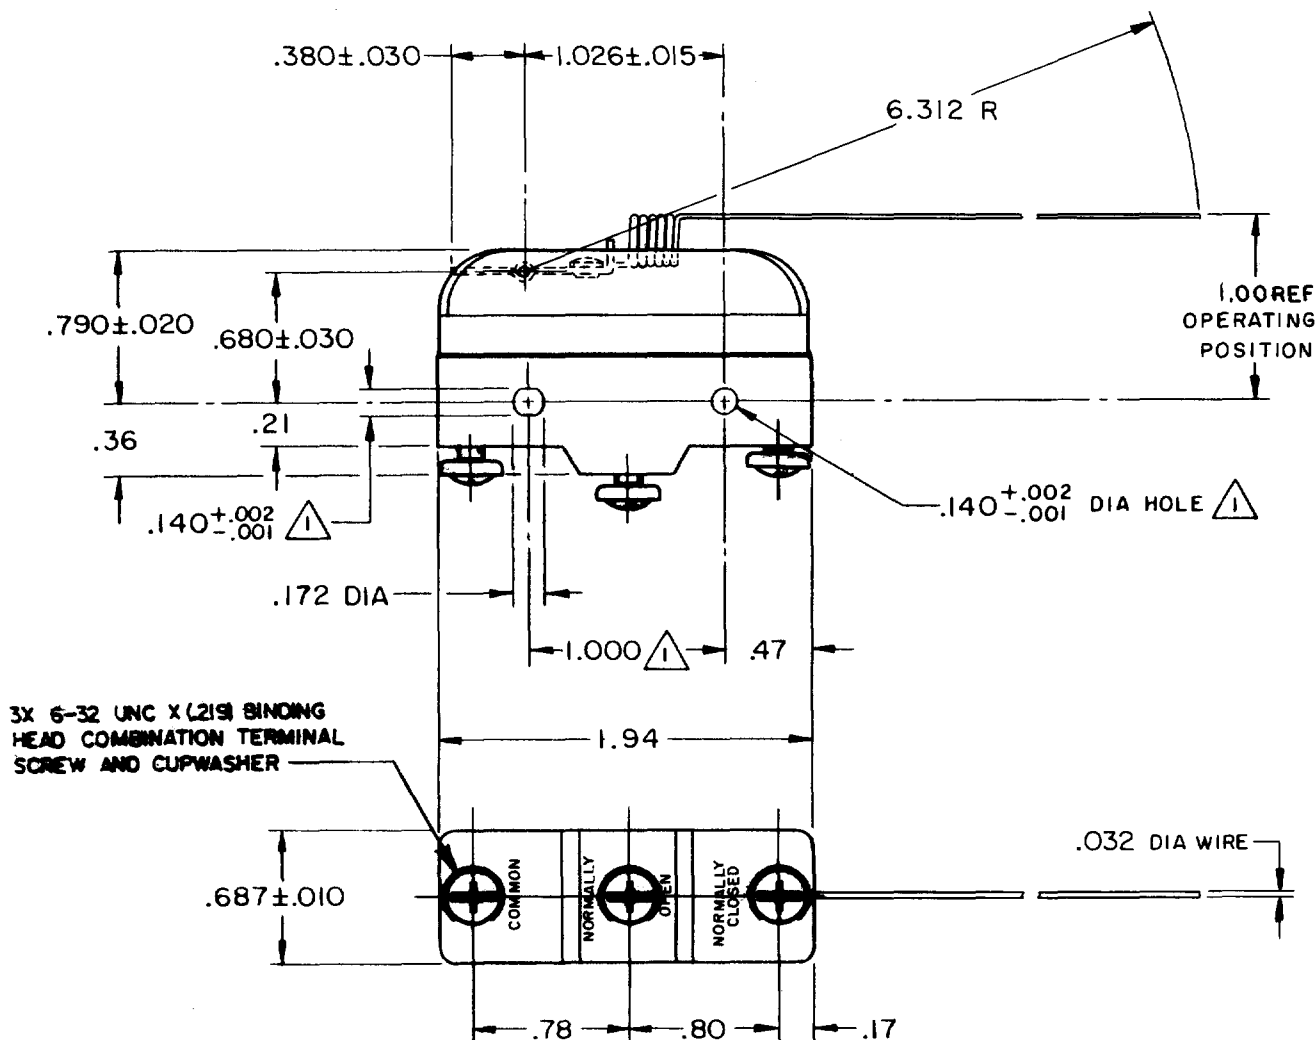

NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON $1.000 \pm .002$ CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS**ELECTRICAL DATA**

SCALE FULL

CONTACT ARRANGEMENT
S P D T

DO NOT SCALE PRINT

UNDEWRITERS' LAB. INC. LISTED RATING

-L96- 15 A-125, 250, OR 480 VAC
1/2 A-125 VDC; 1/4 A-250 VDC
1/8 HP-125 VAC; 1/4 HP-250 VAC

-L288-
-L299-
-L306-

CE D T85 5E4

UNLESS OTHERWISE NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.0) $\pm .030$
TWO PLACE (.00) $\pm .015$
THREE PLACE (.000) $\pm .005$
ANGLES $\pm$

WEIGHT