


## Technical Characteristics

### Part Number

#### Han 10B Ethernet/Power/Signal Kit

|                             |                           |
|-----------------------------|---------------------------|
| Hood                        | Side Entry                |
| Housing                     | Double Lever Bulkhead     |
| Material                    | Die Cast Aluminum         |
| IP / NEMA                   | IP67 / 4, 4x, 12          |
| Temp Rating                 | -40 to +125C              |
| Cable Gland                 | M32 Metal                 |
| Cable Diameter              | 13-20 / 18-25mm           |
| Insert                      | See "Kit Contents"        |
| Termination (Rj45 / Signal) | IDC/Axial Screw/Quicklock |

**73 10 100 0015**


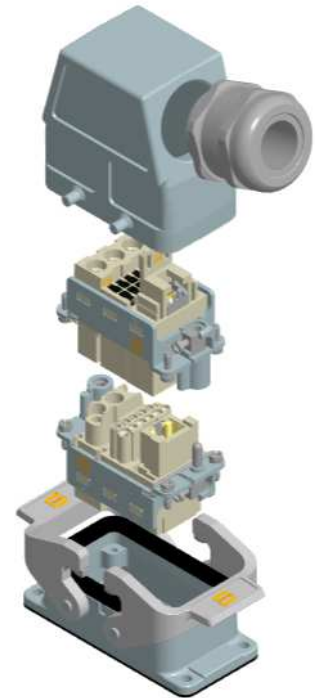


#### Electrical Characteristics

|          |                   |
|----------|-------------------|
| Ethernet | Cat.6 (8 wire)    |
| Power    | 3 x (40A / 600V)  |
| Signal   | 12 x (10A / 600V) |

## Drawings and Assembly Information

Dimensions in mm

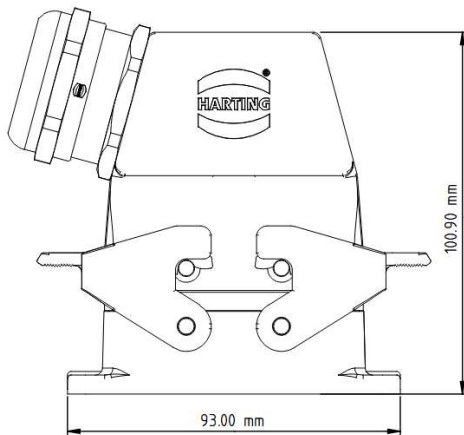

### Kit Contents

|                      |                |
|----------------------|----------------|
| Male Rj45            | 09 45 400 1560 |
|                      | 09 14 001 4623 |
| Female Rj45          | 09 14 001 4721 |
| Male Signal Module   | 09 14 012 2632 |
| Female Signal Module | 09 14 012 2732 |
| Male Power Module    | 09 14 003 2601 |
| Female Power Module  | 09 14 003 2701 |
| Hinged Frame 1       | 09 14 010 0361 |
| Hinged Frame 2       | 09 14 010 0371 |
| Housing              | 09 30 010 1301 |
| Hood                 | 19 30 010 0527 |
| Cable Gland          | 19 00 000 5095 |

NOTE: See "Kit Contents" for individual module part numbers. All part numbers are available on the HARTING B2B E-Catalogue. See website for detailed specifications and drawings.  
Fine stranded wire required for Quicklock and Axial screw termination

For further information, please reach out to  
[techsupportUS@HARTING.com](mailto:techsupportUS@HARTING.com)