





DB UNLIMITED

Part Number:	DRAWN	11/10/2017
	CJ	
	CHECKED	11/20/2017
Description:	P.D.	11/20/2017
	APPROVED	
	C.E.	11/20/2017
This document contains data proprietary to DB Unlimited. Any use or reproduction, in any form, without prior written permission of DB Unlimited is prohibited. All terms and conditions can be found at www.dbunlimitedco.com		


Top View

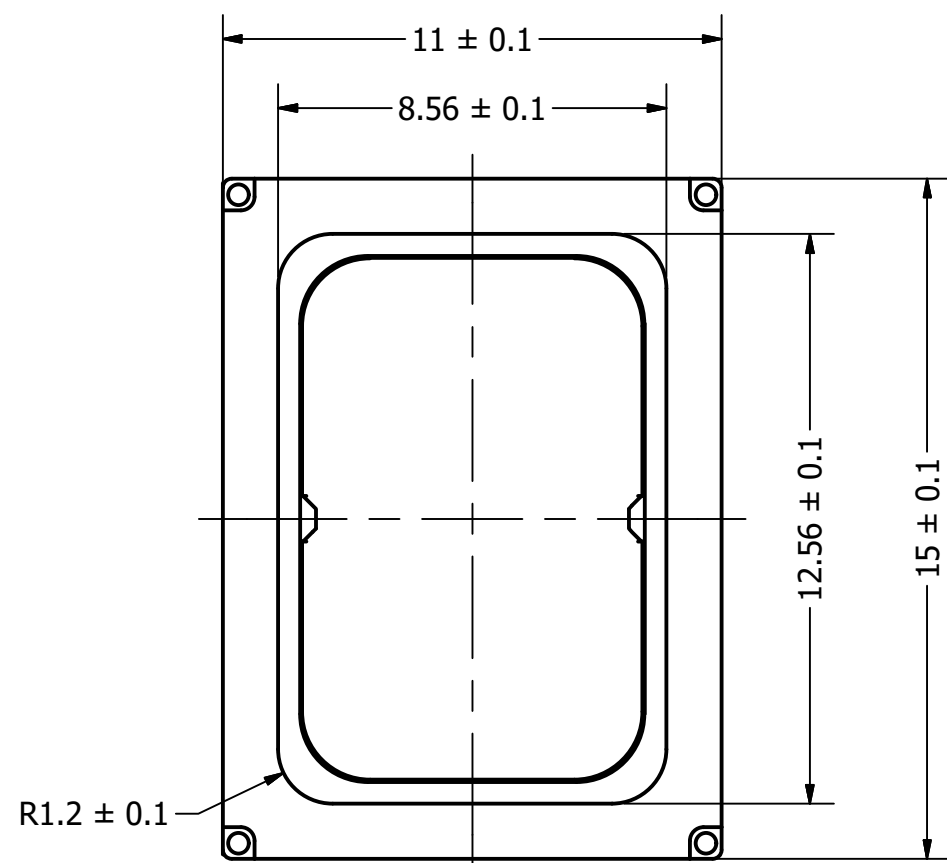


Side View (1)

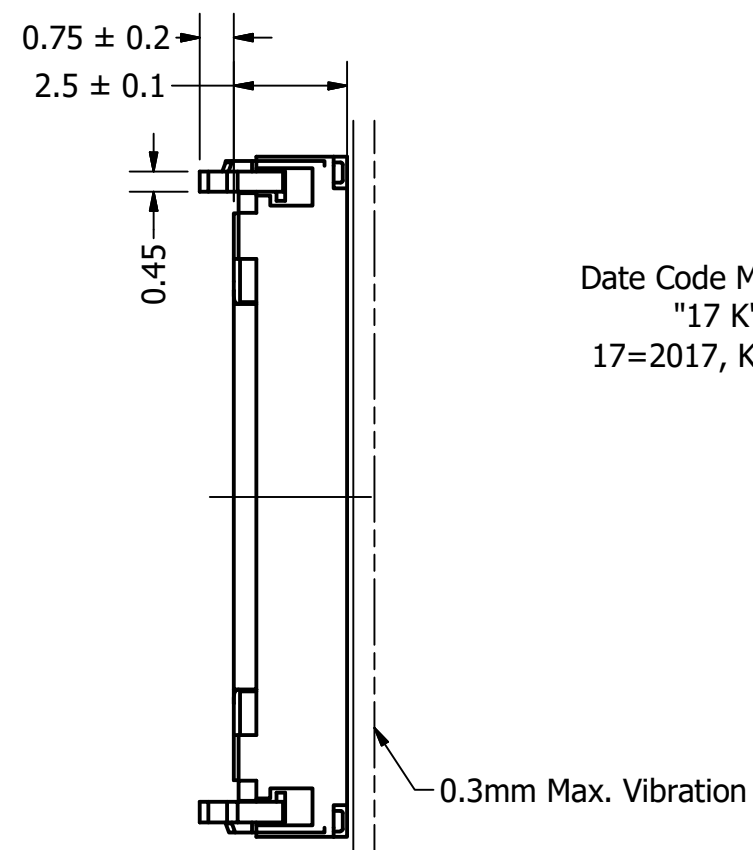


Bottom View

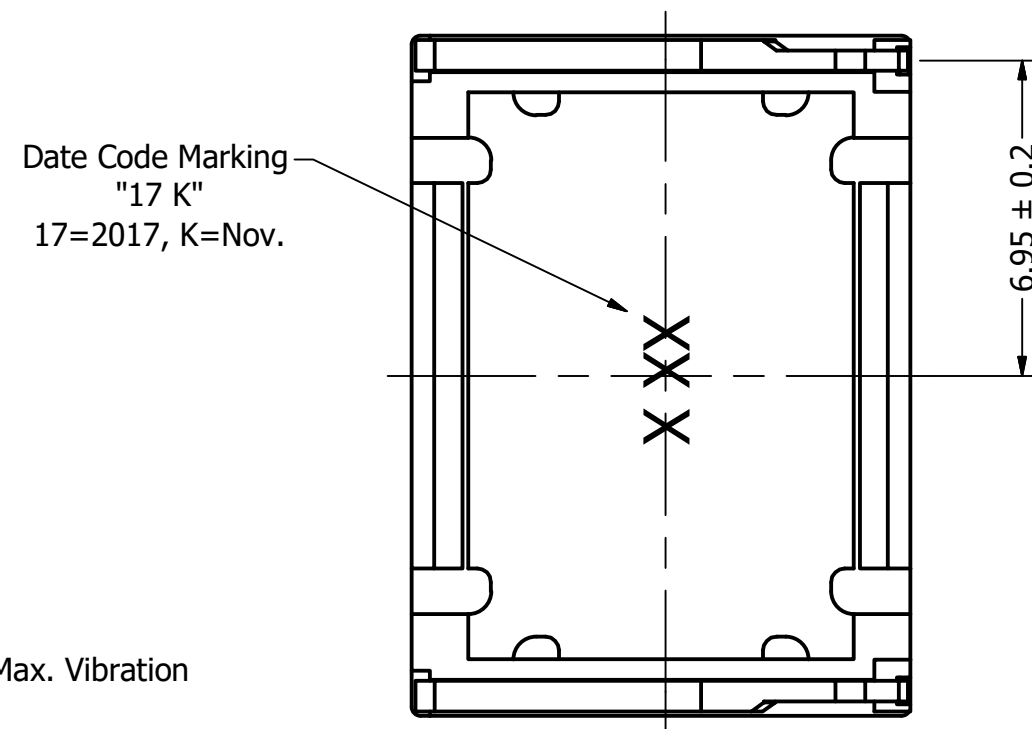

Recommended Land Pattern

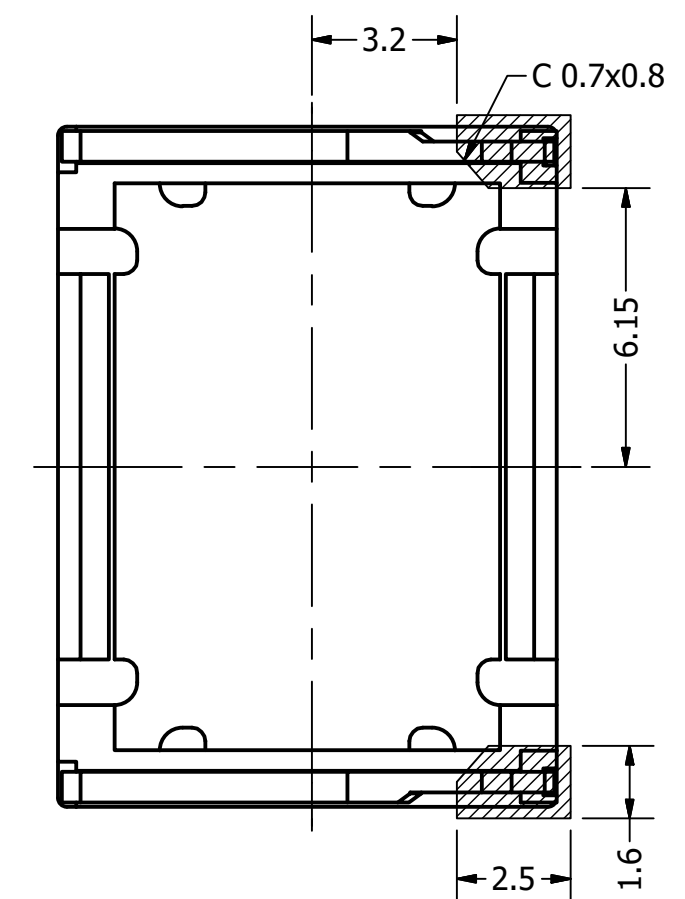

Side View (2)

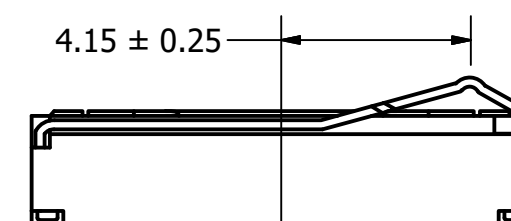

Items	Specifications	Conditions	REVISION HISTORY			
Sound Pressure Level	93	dB (@ 10cm)	REV	DESCRIPTION	DATE	APPROVED
Resonant Frequency	850	Hz		Released from Engineering	11/20/2017	C.E.
Frequency Range	850 ~ 10,000	Hz	1	Update Operating Temp	3/15/2018	C.E.
Nominal Power	1	W	2	Update Operating Temp	3/22/2018	C.E.
Max. Power	1.5	W				
Impedance	8	Ω				
Cone Material	Polymer					
Mount Type	Flush Mount					
Storage Temperature	-40 ~ +85	°C				
Operating Temperature	-40 ~ +85	°C				
Weight	1.4	g				
			NOTES			
			1) All dimensions are in mm unless otherwise noted			
			2) All tolerances are ± 0.15 mm unless otherwise noted			
			3) All parts meet RoHS			
			4) Subject to change or redrawn without notice			