

ANTENNA PRODUCTS

DATA SHEET

2012 Ceramic Chip Antenna for Bluetooth/WLAN Application

Feb, 2007 V1

	Print date 07/06/05							
	2012 Ceramic Chip Antenna for Bluetooth/WLAN Application				CAN4311714XX2454K		Feb, 2007	
Justin Liu	C.T.Lee			Page 1	sheet 190-1			A4
spec.doc	Yageo Taiwan							

2012 Ceramic Chip Antenna for Bluetooth/WLAN Application

Quick Reference Data

Centre Frequency	2.45 GHz* ¹
Bandwidth	at least 70 MHz* ²
VSWR	2.5 (Max.)* ²
Polarization	Linear
Azimuth Beamwidth	Omni-directional
Peak Gain	4.0 dBi* ²
Impedance	50Ω
Operating Temperature	-55~125 °C
Termination	Ni / Sn (Environmentally-Friendly Leadless)
Resistance to soldering heats	260°C , 10sec.
Maximum Power	1W




¹ All the technical data and information contained herein are subject to change without prior notice

² Testing under evaluation board of page 4


	Print date 07/06/05						
	2012 Ceramic Chip Antenna for Bluetooth/WLAN Application				CAN4311714XX2454K		Feb, 2007
Justin Liu	C.T.Lee			Page 2	sheet 190-2		A4
spec.doc	Yageo Taiwan						

1. Mechanical Data (2.0 x 1.25 x 1.1 mm)

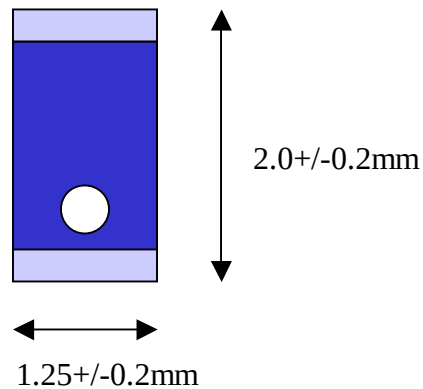


Unit: mm

2. Layout of Soldering Pads

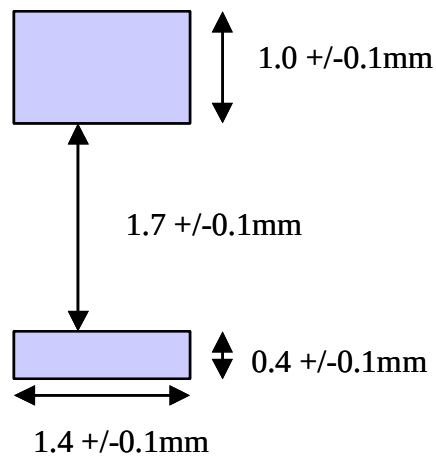

	Print date 07/06/05						
	2012 Ceramic Chip Antenna for Bluetooth/WLAN Application				CAN4311714XX2454K		Feb, 2007
Justin Liu	C.T.Lee			Page 3	sheet 190-3		A4
spec.doc	Yageo Taiwan						


3. Dimension and Outlook of Evaluation Board

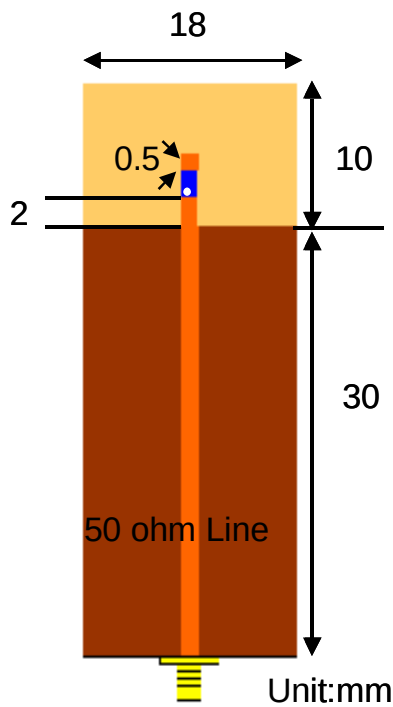

Unit: mm

	Print date 07/06/05						
	2012 Ceramic Chip Antenna for Bluetooth/WLAN Application				CAN4311714XX2454K		Feb, 2007
Justin Liu	C.T.Lee			Page 4	sheet 190-4		A4
spec.doc	Yageo Taiwan						


4. Measurement of S-parameter

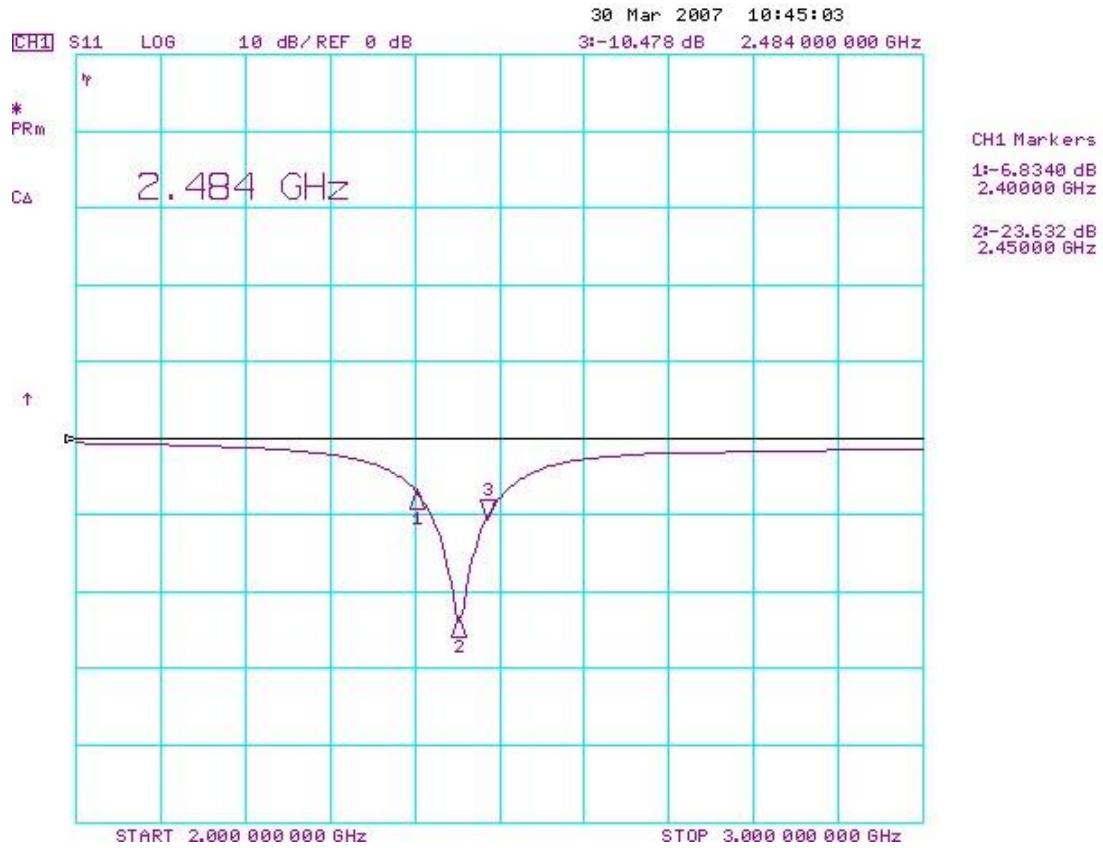

	Print date 07/06/05						
	2012 Ceramic Chip Antenna for Bluetooth/WLAN Application				CAN4311714XX2454K		Feb, 2007
Justin Liu	C.T.Lee			Page 5	sheet 190-5		A4
spec.doc	Yageo Taiwan						


5.The Environment of Antenna Radiation Pattern

Anechoic Chamber Dimension=8(m) × 4(m) × 4(m)

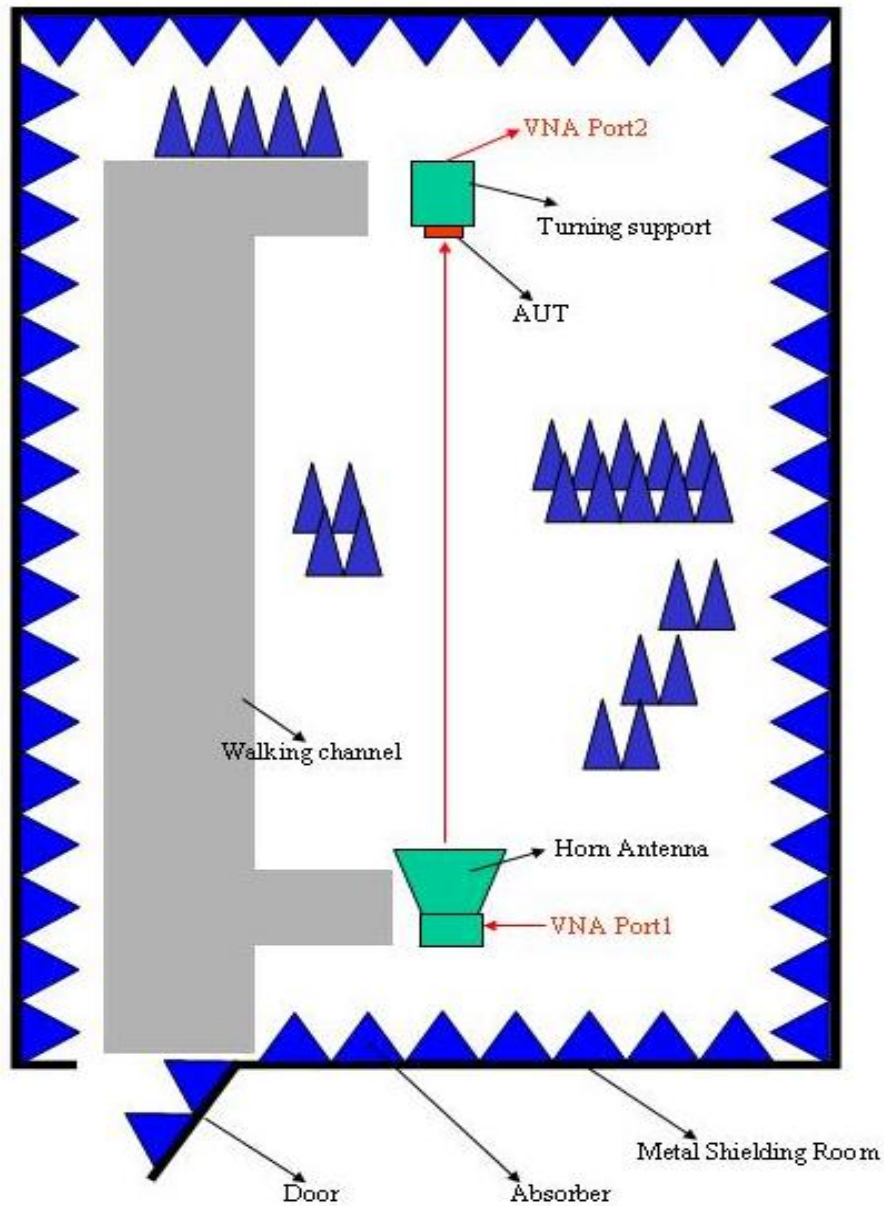


	Print date 07/06/05						
	2012 Ceramic Chip Antenna for Bluetooth/WLAN Application				CAN4311714XX2454K		Feb, 2007
Justin Liu	C.T.Lee			Page 6	sheet 190-6		A4
spec.doc	Yageo Taiwan						

6. 3D Radiation Pattern (40x18 mm demo board)

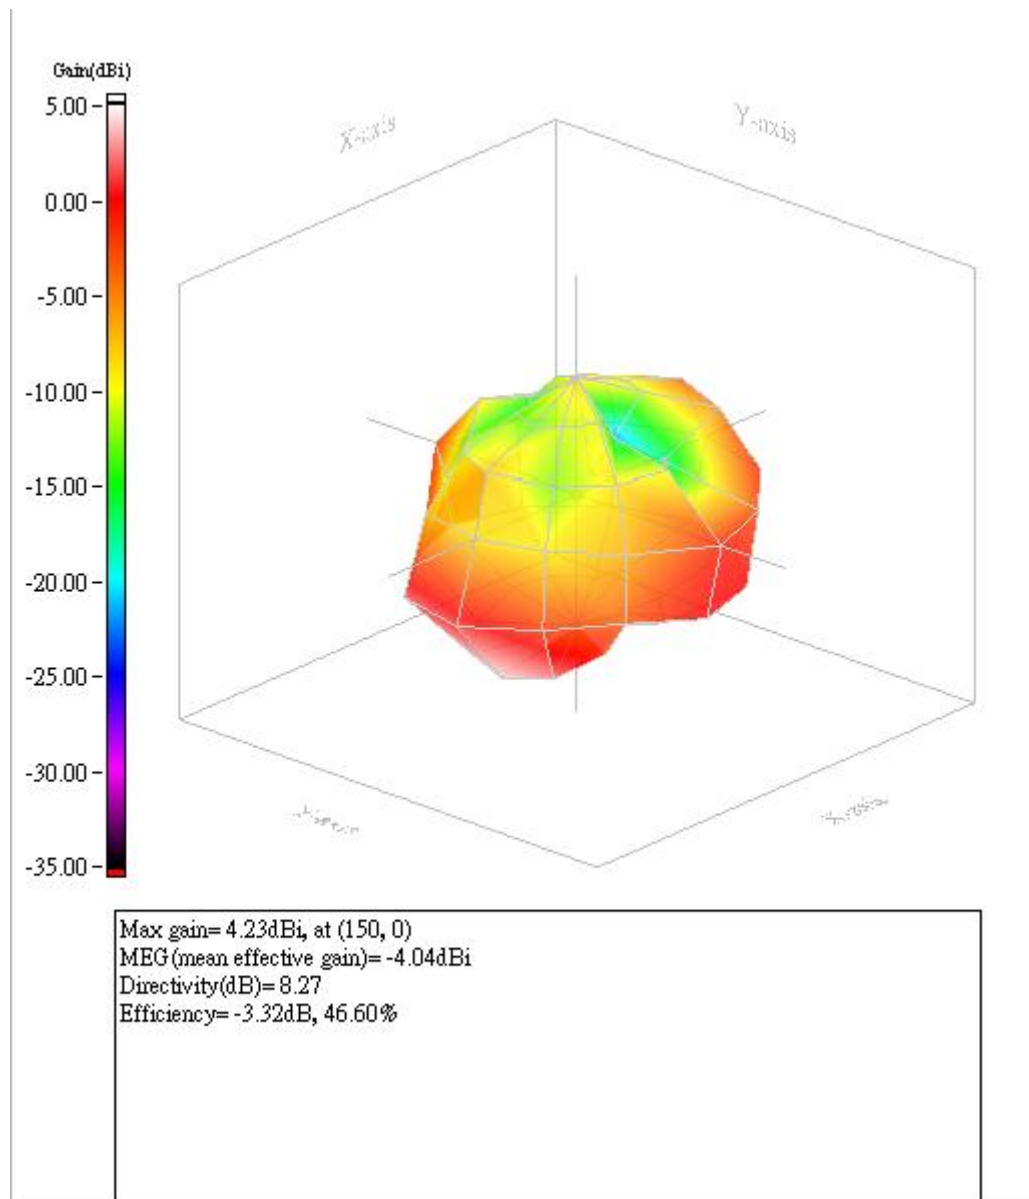

7. Layout Recommendation in Application

	Print date 07/06/05						
	2012 Ceramic Chip Antenna for Bluetooth/WLAN Application				CAN4311714XX2454K		Feb, 2007
Justin Liu	C.T.Lee			Page 7	sheet 190-7		A4
spec.doc	Yageo Taiwan						

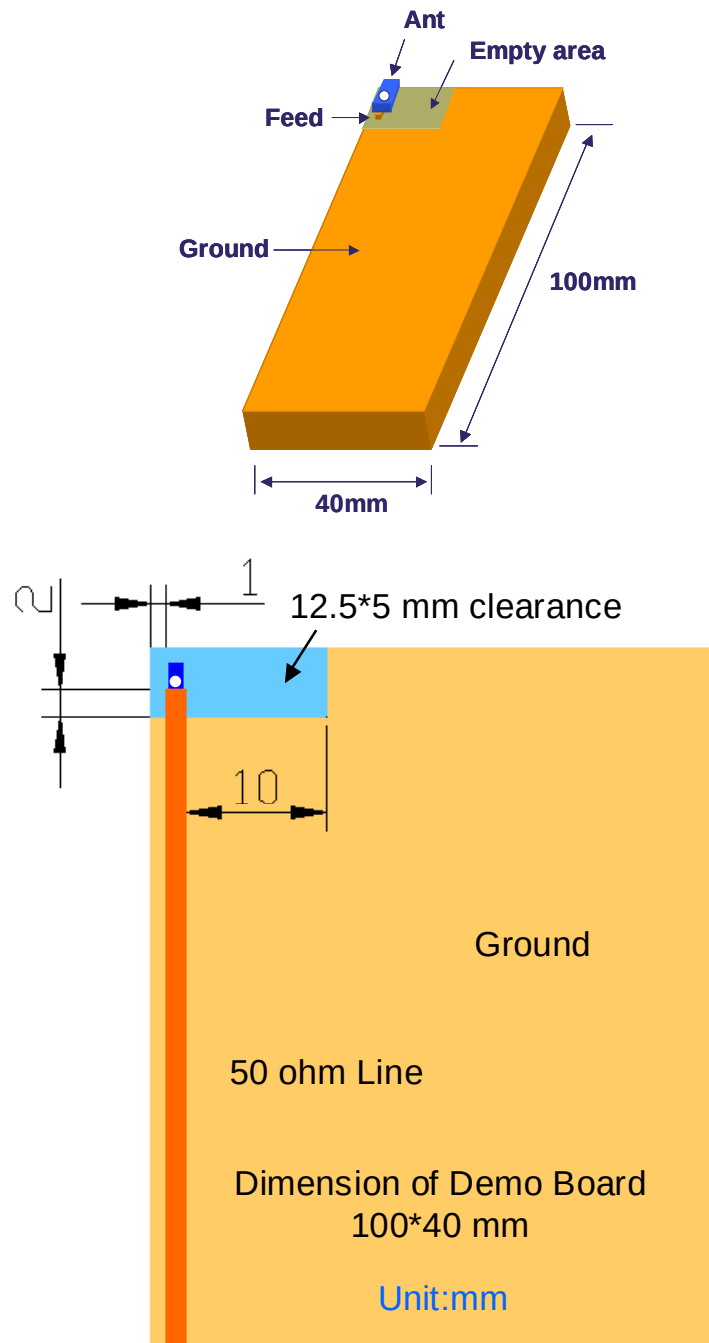

	Print date 07/06/05						
	2012 Ceramic Chip Antenna for Bluetooth/WLAN Application				CAN4311714XX2454K		Feb, 2007
Justin Liu	C.T.Lee			Page 8	sheet 190-8		A4
spec.doc	Yageo Taiwan						

IEC 384-10/ CECC 32 100 CLAUSE	IEC 60068-2 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS
4.4		Mounting	The antenna can be mounted on printed-circuit boards or ceramic substrates by applying wave soldering, reflow soldering (including vapour phase soldering) or conductive adhesive	No visible damage
4.5		Visual inspection and dimension check	Any applicable method using $\times 10$ magnification	In accordance with specification (chip off 4mm)
4.6.1		Antenna	Central Frequency at 20 °C	Standard test board in page 4
4.8		Adhesion	A force of 3 N applied for 10 s to the line joining the terminations and in a plane parallel to the substrate	No visible damage
4.9		Bond strength of plating on end face	Mounted in accordance with CECC 32 100, paragraph 4.4	No visible damage
			Conditions: bending 0.5 mm at a rate of 1mm/s, radius jig. 340 mm, 2mm warp on FR4 board of 90 mm length	No visible damage
4.10	20(Tb)	Resistance to soldering heat	260 $\pm$ 5 °C for 10 $\pm$ 0.5 s in a static solder bath	The terminations shall be well tinned after recovery and Central Freq. Change $\pm$ 6%
		Resistance to leaching	260 $\pm$ 5 °C for 30 $\pm$ 1 s in a static solder bath	Using visual enlargement of $\times 10$, dissolution of the termination shall not exceed 10%

Print date 07/06/05									
2012 Ceramic Chip Antenna for Bluetooth/WLAN Application					CAN4311714XX2454K			Feb, 2007	
Justin Liu	C.T.Lee				Page 9	sheet 190-9			A4
spec.doc	Yageo Taiwan								

IEC 384-10/ CECC 32 100 CLAUSE	IEC 60068-2 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS
4.11	20(Ta)	Solderability	Zero hour test, and test after storage (20 to 24 months) in original atmosphere; un-mounted chips completely immersed for 2 ± 0.5 s in $235 \pm 5^{\circ}\text{C}$.	The termination must be well tinned, at least 75% is well tinned at termination
4.12	4(Na)	Rapid change of temperature	-25°C (30 minutes) to $+85^{\circ}\text{C}$ (30 minutes); 100 cycles	No visible damage Central Freq. Change $\pm 6\%$
4.14	3(Ca)	Damp heat	500 ± 12 hours at 60°C ; 90 to 95 % RH	No visible damage 2 hours recovery Central Freq. Change $\pm 6\%$
4.15		Endurance	500 ± 12 hours at 85°C ;	No visible damage 2 hours recovery Central Freq. Change $\pm 6\%$

	Print date 07/06/05						
	2012 Ceramic Chip Antenna for Bluetooth/WLAN Application				CAN4311714XX2454K		Feb, 2007
Justin Liu	C.T.Lee			Page 10	sheet 190-10		A4
spec.doc	Yageo Taiwan						

Ordering Information

The antennas may be ordered by using the Yageo ordering code. These code numbers can be determined by the following rules:

CAN43 11 7 14 XX 245 4K

Family Code

CAN 43 = Yageo Part No. for Antenna

Packing Type Code

11 = 180 mm/ 7" reel , blister taping

Materials Code

7 = High Frequency Material

Size Code

11 = 3.2 * 2.5

12 = 3.2 * 1.6

13 = 2.5 * 2.0

14 = 2.0 * 1.2

15 = 1.6 * 0.8

Antenna type

00 = normal type

02 = Type 2

03 = Type 3

04 = Type 4

05 = Type 5

06 = Type 6

07 = Type 7

08 = Type 8

09 = Type 9

Working Frequency


245 = 2.45 GHz

Packing Type Code

	Print date 07/06/05						
	2012 Ceramic Chip Antenna for Bluetooth/WLAN Application				CAN4311714XX2454K		Feb, 2007
Justin Liu	C.T.Lee			Page 11	sheet 190-11		A4
spec.doc	Yageo Taiwan						

4K = 4000 pcs for taping per reel

Taping Blister Tape

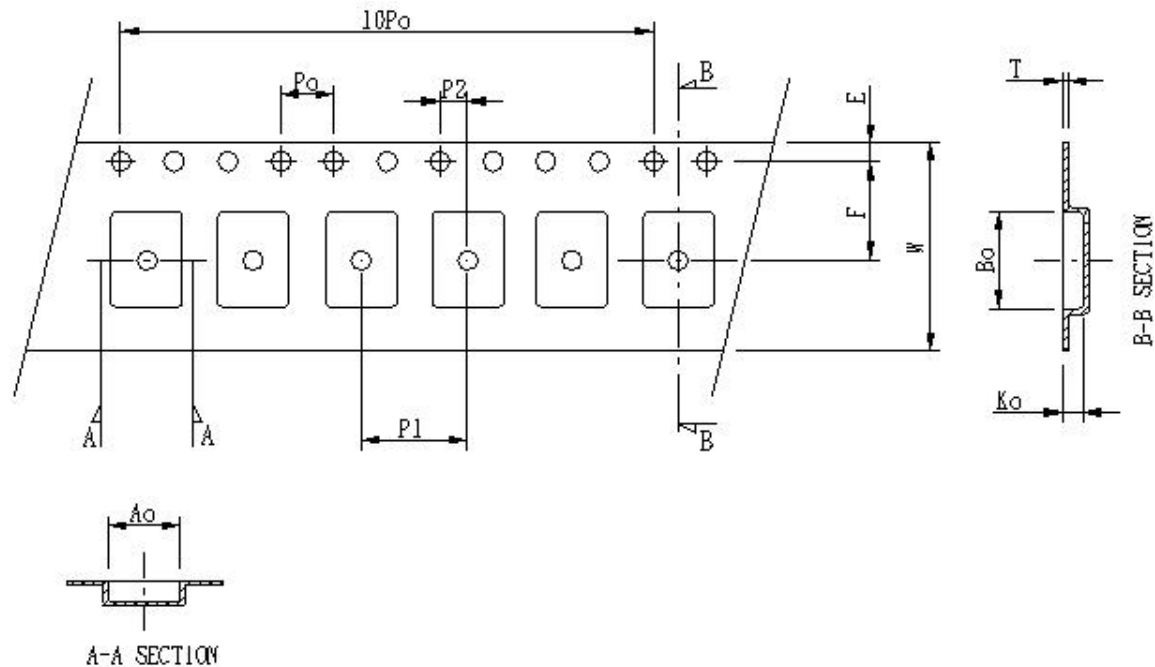


DIMENSION:

Serial no	Cecking note	Index	Spec(mm)
1	Sprocket hole	Do	1.50±0.10
2	Pocket hole	D1	≥1
3	Distance sprocket hole/sprocket hole	Po	4.0±0.10
4	Distance pocket/pocket	P1	4.0±0.10
5	Distance sprocket hole/pocket	P2	2.0±0.10
6	Tape width	W	8.1±0.20
7	Distance sprocket hole/outside	E	1.75±0.10
8	Distance sprocket hole/pocket	F	3.5±0.05
9	Pocket length nominal clearance	Ao	1.42±0.10
10	Pocket length nominal clearance	Bo	2.24±0.10
11	Pocket depth minimum clearance	Ko	1.2±0.10
12	Thickness of tape	T	0.22±0.05
13	10x sprocket hole pitch	10Po	40.0±0.20

	Print date 07/06/05						
	2012 Ceramic Chip Antenna for Bluetooth/WLAN Application				CAN4311714XX2454K		Feb, 2007
Justin Liu	C.T.Lee			Page 12	sheet 190-12		A4
spec.doc	Yageo Taiwan						

	Print date 07/06/05						
	2012 Ceramic Chip Antenna for Bluetooth/WLAN Application			CAN4311714XX2454K			Feb, 2007
Justin Liu	C.T.Lee			Page 13	sheet 190-13		A4
spec.doc	Yageo Taiwan						

7"(180mm) Reel Specifications

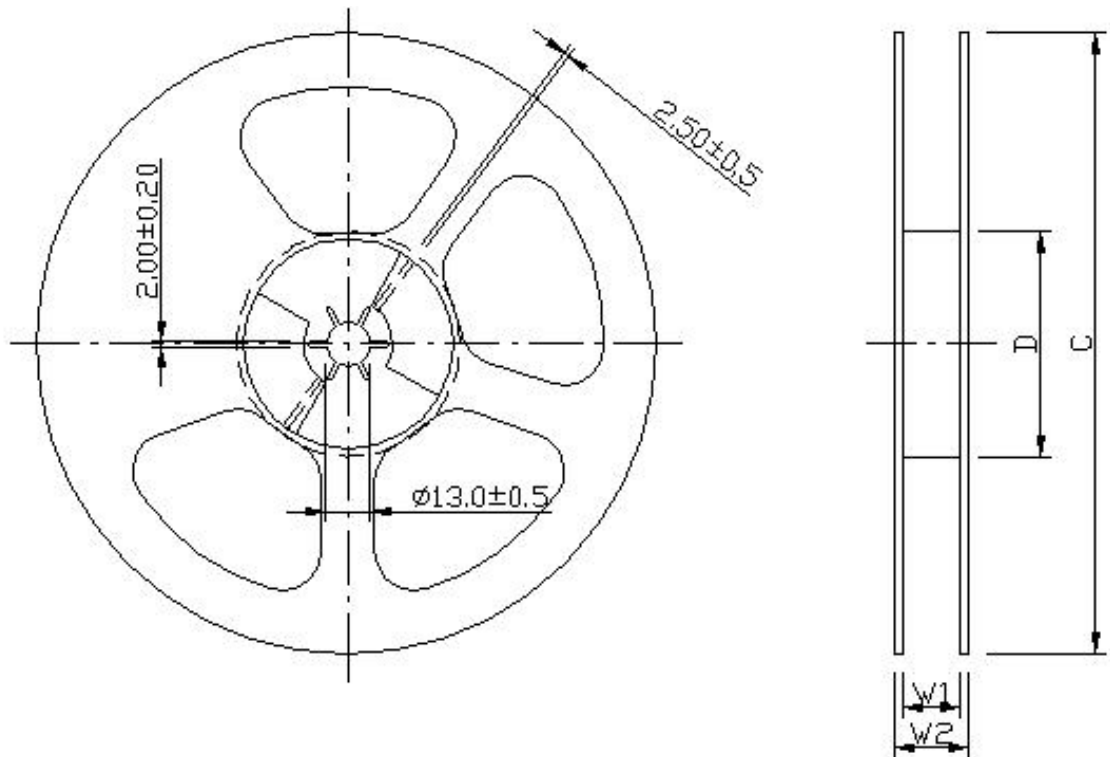

Product size code	Units per Reel	Tape Width (mm)	C (mm)	D (mm)	W ₁ (mm)	W ₂ (mm)
Antenna	4000	8	180.0±1.0	62±1.5	8.4+/-0.15	14.4 max

	Print date 07/06/05						
	2012 Ceramic Chip Antenna for Bluetooth/WLAN Application				CAN4311714XX2454K		Feb, 2007
Justin Liu	C.T.Lee			Page 14	sheet 190-14		A4
spec.doc	Yageo Taiwan						

Revision Control:

Revision	Date	Content	Remark
V1	Feb, 2007	New Issued	

	Print date 07/06/05						
	2012 Ceramic Chip Antenna for Bluetooth/WLAN Application			CAN4311714XX2454K			Feb, 2007
Justin Liu	C.T.Lee			Page 15	sheet 190-15		A4
spec.doc	Yageo Taiwan						