


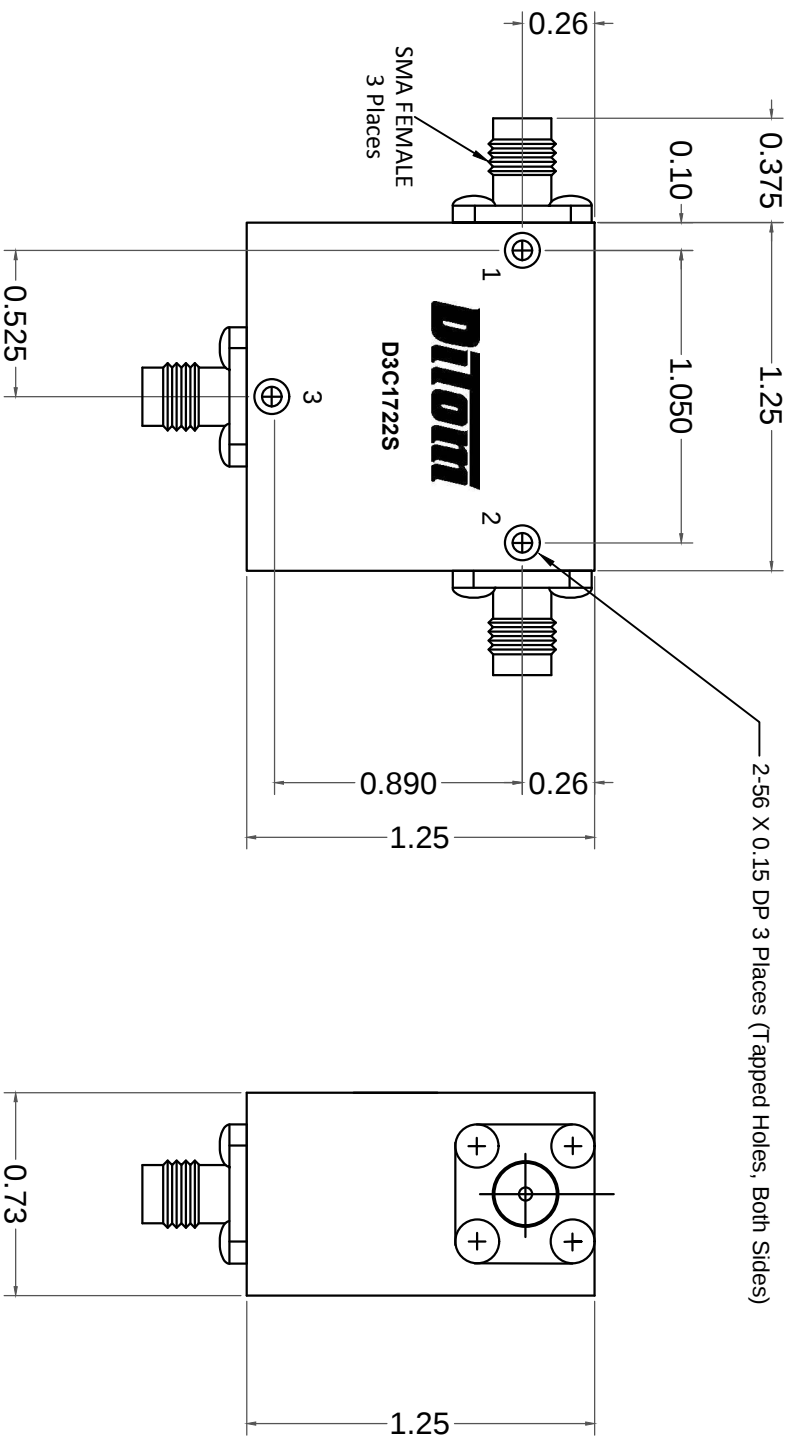

ELECTRICAL SPECIFICATIONS

FREQUENCY RANGE (MHz):	1700 - 2200
ISOLATION (dB):	20 MIN
INSERTION LOSS (dB):	0.40 MAX
VSWR:	1.25 MAX
POWER: AVG (PORT 1 TO 2):	150W
PEAK:	500W

MECHANICAL SPECIFICATIONS

CONNECTORS:	SMA-FEMALE, PASSIVATED STAINLESS STEEL
CONTACT PINS:	BERYLLIUM COPPER, GOLD PLATE
OPERATING TEMPERATURE:	-20° to +65°C
WEIGHT (APPROX):	1.20 OUNCES

DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED		DITOM MICROWAVE INC. Fremont, California, USA	
TOLERANCE	TITLE		
XX±0.03 XXX±0.010	1700 - 2200 MHz Circulator		
SCALE	MODEL NO		
3:1	D3C1722S		
	REV		