


LE910 Cat.1 Series

LTE Cat.1 10/5 Embedded

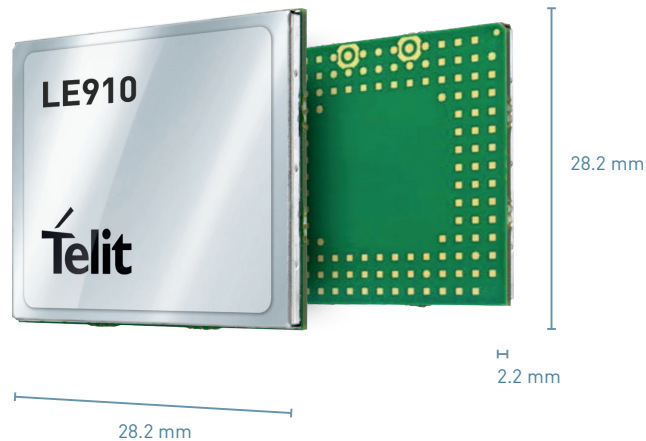

Product Description

The LE910 series of Cat. 1 modules are optimized for LTE low category networks and are available in single mode and 3G/2G fallback options. In addition to VoLTE support, the LE910Cat.1 series are swappable with other modules in the xE910 family.

Key Benefits

- Easy to integrate with peripherals and actuators using USB 2.0 HS, UART and user definable GPIOs
- Ideal platform for IoT applications and mobile data and computing devices with ultra-compact design and extended operating temperature range
- Internet friendly with integrated TCP/IP and UDP/IP stacks, as well as HTTP, SMTP, FTP, SSL
- Simple drop-in migration and technology design reuse path to 2G and 3G with any xE910 module
- Over-the-Air firmware update

Family Concept

These LTE low category variants are members of Telit's flagship xE910 module family delivering 4G radio access technology in the 28.2 x 28.2 x 2.2 mm family form factor. The Telit xE910 Unified Form Factor Family is comprised of 2G, 3G, and 4G, 3GPP and 3GPP2 products sharing a common form factor as well as electrical and programming interfaces which allows developers to implement a "design once, use anywhere" strategy.

IoT Connectivity Ready

This product is capable of supporting the extensive suite of Value Added Services from IoT Connectivity including Module Management and others which make the management of IoT deployments under mobile networks effective, enhancing profitability and reliability. It is also Portal-ready which means that the AT command library in this module includes a set of high-level commands designed exclusively for quick and hassle-free on-boarding of the device to the portal and to back-end systems and servers. Telit Portal-ready modules powered by deviceWISE make application-level data flows and controls simple to program, maintain and improve.

Variants

Different series of variants are available to fulfill the requirements of North America (AT&T, T-Mobile, Verizon, Rogers, Telus), Japanese and European market. Multiband configurations, covering different sets of 4G bands as well as MNO certifications, are available.

AVAILABLE FOR

EMEA

North America

Latin America

Japan

Korea

Australia

Combine your Cat 1 module with

High precision GNSS modules



www.telit.com

Complete, Ready to Use Access to the Internet of Things



IoT MODULES



IoT CONNECTIVITY



IoT PLATFORMS



IoT KNOW-HOW

ENABLING END-TO-END
IOT SOLUTIONS

	LE910-SV1	LE910-SVL	LE910-NA1	LE910B1-NA	LE910B1-SA	LE910-EU1	LE910B1-EU	LE910-JN1
Market	North America (Verizon)	North America (Verizon)	North America (AT&T, T-Mobile)*	North America (AT&T, T-Mobile)*	North America (AT&T, T-Mobile)	Europe	Europe	Japan (NTT DoCoMo)
Frequencies								
4G bands (MHz)	B2(1900) B4(AWS1700) B13(700)	B4(AWS1700) B13(700)	B2(1900) B4(AWS1700) B5(850) B12/B13(700)	B2(1900) B4(AWS1700) B5(850) B12/B13(700)	B2(1900) B4(AWS1700) B12(700)	B1(2100) B3(1800) B7(2600) B8(900) B20(800)	B3(1800) B8(900) B20(800)	B1(2100) B19(850) B21(1500)
3G bands (MHz)			B2(1900) B5(850)	B2(1900) B5(850)				
2G bands (MHz)						B3(1800) B8(900)		
Voice	VoLTE	VoLTE		VoLTE	VoLTE			

LE910 Cat.1 Series

Product Features

- LTE FDD Cat.1, 3GPP release 9 compliant
- Rx Diversity and MIMO DL 2x2
- SIM application Tool Kit 3GPP TS 51.014
- Serial port multiplexer 3GPP TS27.010
- SMS over IMS
- Built in UDP/TCP/FTP/SMTP stack
- Control via AT commands according to 3GPP TS 27.005, 27.007 and Telit Custom AT commands
- VoLTE

Data

LTE Cat.1

- Uplink up to 5 Mbps
- Downlink up to 10 Mbps

Environmental

- Dimensions 28.2 x 28.2 x 2.2 mm
- Operating and Storage Temperature Range -40°C to +85°C
- REACH and RoHS compliant

Interfaces

- 144-pin LGA Interface
- 10 I/O ports (@1.8V) including multifunctional I/Os
- USB 2.0 HS
- UART
- 1.8 V / 3 V SIM interface
- RF pad, RX Div. & MIMO pad

Approvals

- FCC/IC, PTCRB, GCF (North America)
- R&TTE/GCF (Europe)
- Radio/Telecom Biz Act (Japan)

Electrical & Sensitivity

- Output power
 - Class 3 (0.2 W, 23 dBm) @ LTE
 - Class 3 (0.25 W, 23 dBm) @ 3G
 - Class 4 (2W) @ GSM 900
 - Class 1 (1W) @ DCS 1800
- Supply voltage
 - Nominal: 3.8 VDC
 - Range: 3.3 - 4.2 VDC

Software and Application Development

AppZone application resources

- Programming language: C
- IDE: Eclipse
- Dedicated File System: 5 MB
- Separate App. RAM Space: 2 MB

***Single SKU** option available for LE910-NA1 with flexibility to switch between AT&T/T-Mobile/Canada and Verizon software configuration and vice versa, due to both bands subset support (B2, B4, B5, B12, B13 for AT&T/T-Mobile/Canada and B2, B4, B13 for Verizon) featuring a Fast Time Switch from one configuration to the other one.

[05-2017] Telit reserves all rights to this document and the information contained herein. Products, names, logos and designs described herein may in whole or in part be subject to intellectual property rights. The information contained herein is provided "as is". No warranty of any kind, either express or implied, is made in relation to the accuracy, reliability, fitness for a particular purpose or content of this document. This document may be revised by Telit at any time. For most recent documents, please visit www.telit.com. Copyright © 2017, Telit
* Copyright © 1990-2017, Python Software Foundation



Join the Telit Technical Forum

Join the Telit Technical Forum and discuss ideas with other members in the IoT community. System integrators, developers and partner companies can exchange opinions and ideas amongst themselves and receive timely valuable assistance from any of the four Telit Technical Support Centers (TTSC) around the world. At the same time, the open forum offers an invaluable technical knowledge database on everything concerning IoT.

Telit Communications S.p.A.
Via Stazione di Prosecco, 5/B
I-34010 Sgonico (Trieste), Italy
Phone +39 040 4192 200
Fax +39 040 4192 383
E-Mail EMEA@telit.com

Telit Wireless Solutions Inc.
3131 RDU Center Drive, Suite 135
Morrisville, NC 27560, USA
Phone +1 888 846 9773 or +1 919 439 7977
Fax +1 888 846 9774 or +1 919 840 0337
E-Mail NORTHAMERICA@telit.com

Telit Wireless Solutions Inc.
Rua Paes Leme, 524, Conj. 126
05424-101, Pinheiros
São Paulo-SP-Brazil
Phone +55 11 3031 5051
Fax +55 11 3031 5051
E-Mail LATINAMERICA@telit.com

Telit Wireless Solutions Co., Ltd.
8th FL., Shinyoung Securities Bld.
6, Gukjegeumyung-ro8-gil, Yeongdeungpo-gu
Seoul, 150-884, Korea
Phone +82 2 368 4600
Fax +82 2 368 4606
E-Mail APAC@telit.com

www.telit.com

www.telit.com/techforum
[www.telit.com/facebook](https://www.facebook.com/telit)
[www.twitter.com/Telit_IoT](https://twitter.com/Telit_IoT)