

1
2
3
4
5
6

RoHS

CUST INFORMATION.

PART NO.	DRAWING NO.	REV.
----------	-------------	------



- NOTE:
1. MATERIAL: 0.20mm THICKNESS COPPER ALLOY
 2. RoHS COMPLIANCE
 3. BILL OF PART NO.

CKM4203-TBX-X-X
STRUCTURE STATUS: →
FINISH: →
1=GOLD FLASH PLATING
2=TIN PLATING
MATERIAL: →
BLANK=HIGT CONDUCTIVITY COPPER ALLOY
1=PHOSPHOR BRONZE
2=BRASS

4. APPLICABLE WIRES: AWG#16~ AWG#28
INSULATION O.D.: 1.3~2.1mm
5. DIMENSIONAL & ORDER INFORMATION:

PART NO.	A	B	C	D	APPLICABLE WIRES
CKM4203-TBS-X-X	3.2	3.4	1.8	2.2	#24~#28
CKM4203-TBL-X-X	3.7	4.5	1.8	2.7	#18~#22
CKM4203-TBL-X-X	3.6	4.5	3.0	2.82	#16

② Q'TY / REEL: 5000 PCS

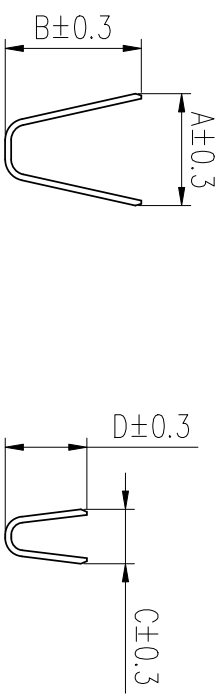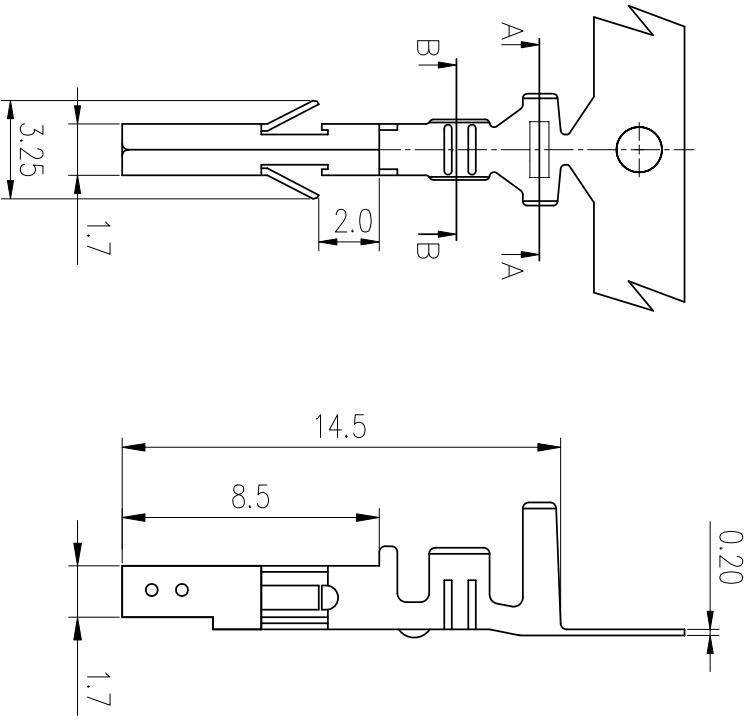

SEC A-A

SEC B-B

		ADD TBL SPEC	GuoXiang.jiang	2018.07.18
B		NEW RELEASE	GuoXiang.jiang	2016.09.21
A				
REV.	ECN NO	REVISION RECORD	DRAW	DATE




TOLERANCE		PART NO.	TITLE.	
X.X ±0.30	X.XXX ±0.10	CKM4203-TBX-X-X	朝貴電子股份有限公司 CKM ELECTRONICS CO., LTD.	
X.XX ±0.20	Angular ±2°	DRAWING NO.	4.2mm PITCH CRIMP TERMINAL	
UNIT: mm		C-CKM4203-TBX-X-X		
DWG TYPE.		APPROVED BY	CHECKED BY	DRAWN BY
Customer Drawing				
				PAGE 1 OF 2
				SCALE 5 : 1
				REV. B

1
2
3
4
5
6



RoHS

CUST INFORMATION.

PART NO.	DRAWING NO.	REV.
----------	-------------	------

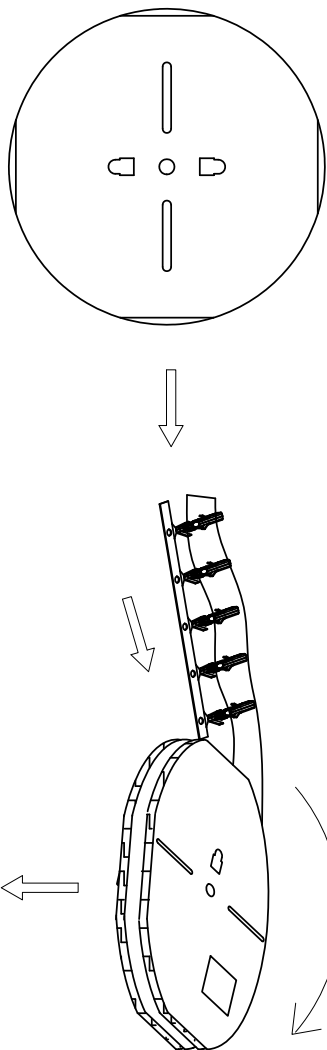

Stick by the label

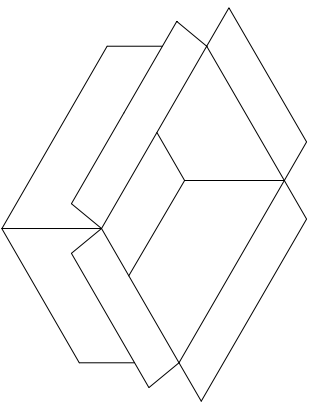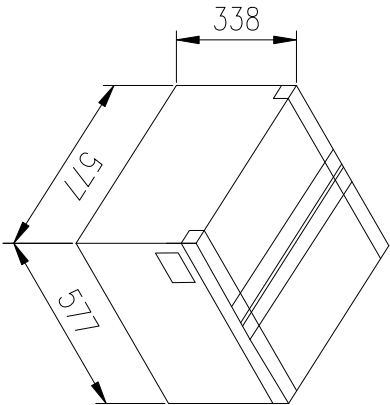

TYPE	REEL	Carton	Weight	
	Pcs/Reel	Pcs/Carton	N/W(kg)	G/W(kg)
TBS	5000	45000	18.0	19.08
TBL	4000	36000	14.4	15.48
TBL	3000	27000	10.8	11.88

B		ADD TBL SPEC	GuoXiang.jiang	2018.07.18
A		NEW RELEASE	GuoXiang.jiang	2016.09.21
REV.	ECN NO	REVISION RECORD	DRAW	DATE
	1			

TOLERANCE		PART NO.		TITLE				
X.	X.XXX ±0.10	CKM4203-TBX-X-X		朝貴電子股份有限公司 CKM ELECTRONICS CO., LTD.				
X.X ±0.30	Angular ±2°	DRAWING NO.	APPROVED BY	CHECKED BY	DRAWN BY			
X.XX ±0.20								
UNIT: mm		4.2mm PITCH CRIMP TERMINAL						
DWG TYPE: Customer Drawing		PAGE 2 OF 2		REV. B				
		SCALE 5 : 1						